

PAMS Technical Documentation

NSE-6 Series Transceivers


Non Serviceable Accessories

CONTENTS

Standard Battery BMP-1D	3
Product Code	3
Glossy Chrome Battery BMP-1A	4
Product Code	4
AC Travel Charger ACP-7	5
Product Codes	5
Specification	5
Performance Travel Charger ACT-1	6
Product Codes	6
Specification	6
Cigarette Lighter Charger LCH-9	7
Product Code	7
Specification	7
Desktop Stand CGE-1	8
Product Code	8
Specification	8
Headset HDC-6	9
Product Code	9

Standard Battery BMP-1D

The BMP-1D is a NiMH battery with 600 mAh capacity in black plastic package.

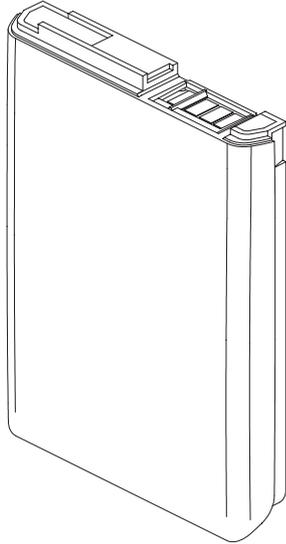


Product Code

Battery pack BMP-1D:

0670240

Glossy Chrome Battery BMP-1A

The BMP-1A is a NiMH battery with 600 mAh capacity in glossy chrome package.

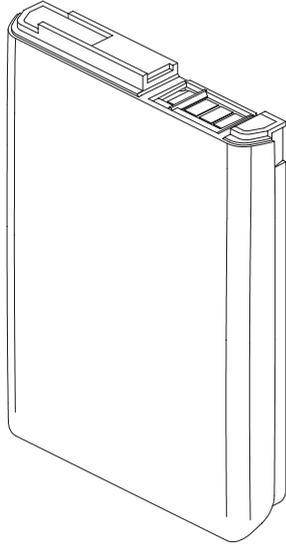


Product Code

Battery pack BMP-1A:

0670230

AC Travel Charger ACP-7

The standard charger is available for different voltage levels and comes with different wall plugs. The standard charger can also be used as a power supply for the desktop stand.

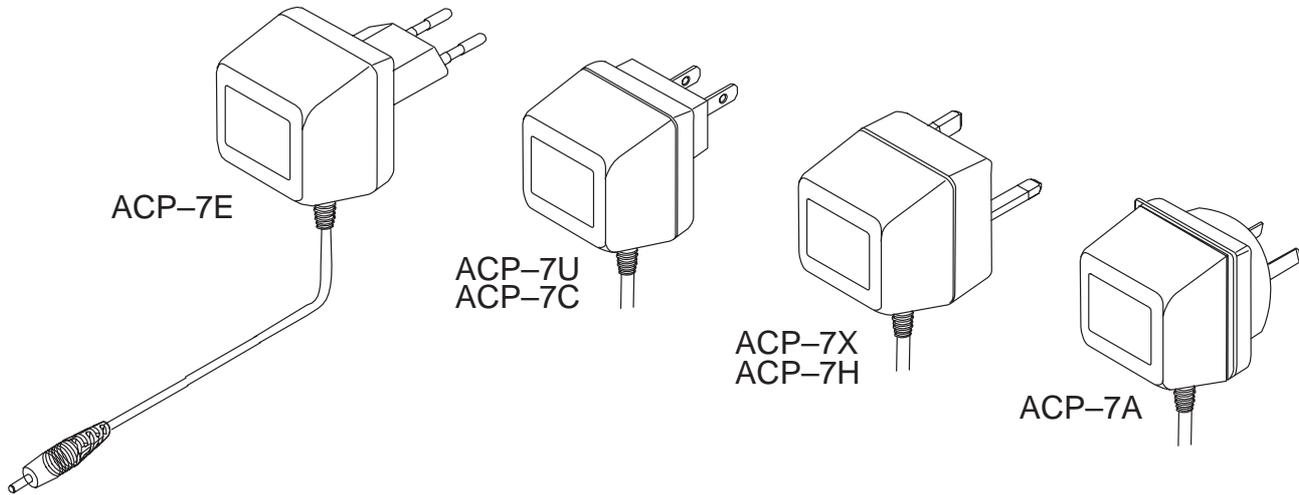

S0001160

Product Codes

AC Travel Charger (Euro plug) 207–253 Vac
 AC Travel Charger (US plug) 108–132 Vac
 AC Travel Charger (US plug) 198–242 Vac
 AC Travel Charger (UK plug) 207–253 Vac
 AC Travel Charger (UK plug) 180–220 Vac
 AC Travel Charger (Australia) 216–264 Vac

ACP-7E 0675144
 ACP-7U 0675143
 ACP-7C 0675158
 ACP-7X 0675145
 ACP-7H 0675146
 ACP-7A 0675148


Specification

Output connectors:	3.5 mm DC plug, 2-pole
Protection:	PTC protection
Output Voltage /Current (typ)	7.6 V / 370 mA

Performance Travel Charger ACT-1

Operating within the voltage range 90 V...264 V AC (50 Hz...60 Hz), the Performance Travel Charger is practically current independent in normal office and household use. Like the standard charger, it is compatible with all battery options and is available for different wall sockets.

The Performance Travel Charger can also be used with desktop stand.

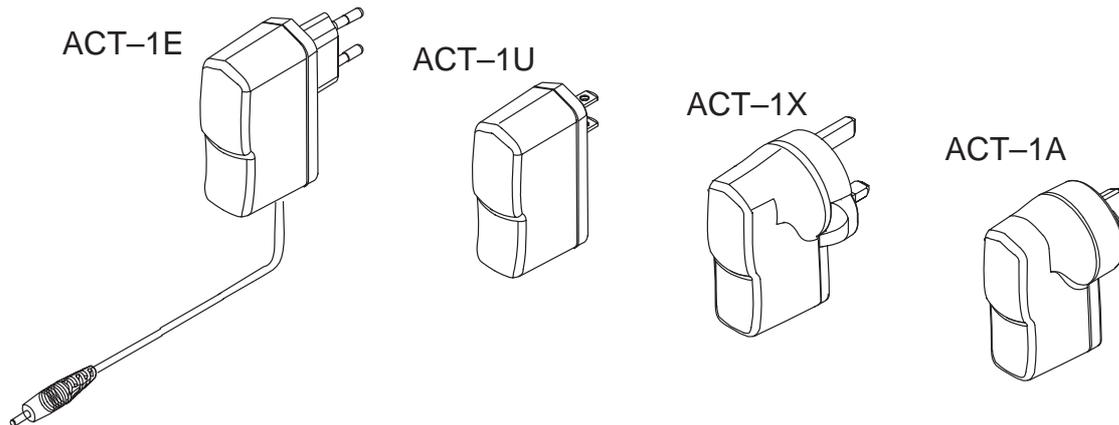

Product Codes


Performance Travel Charger (Euro plug) 90–264 Vac	ACT-1E	0675183
Performance Travel Charger (US plug) 90–264 Vac	ACT-1U	0675184
Performance Travel Charger (UK plug) 90–264 Vac	ACT-1X	0675185
Performance Travel Charger (Australia) 90–264 Vac	ACT-1A	0675186
Output cable PCC-3 (supplied with ACP-1):		0730119

Specification

Output connectors:	<i>3.5 mm DC plug, 3-pole (+, -, control)</i>
Protection:	<i>output current limiting, max. 850 mA</i> <i>output voltage limiting, max. 9.3 V (unloaded)</i>
Output voltage/current (typ):	<i>8.4 V / 800 mA</i>

Desktop Stand CGE-1

The desktop stand provides mounting place for both the phone and a spare battery.

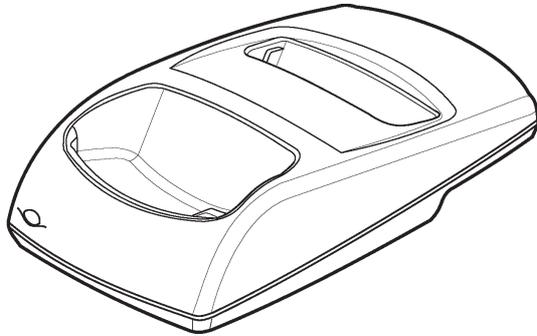

Product Code

Desktop stand CGE-1:


0675180

Specification

Connections:	<i>3.5 mm DC jack (ACP-7 or ACT-1)</i>
Charge control:	MCU control for spare battery charging
Operation input voltage:	<i>9...16 V</i>

Headset HDC-6

The HDC-6 headset provides a also hook switch for the phone/micro-
phone.

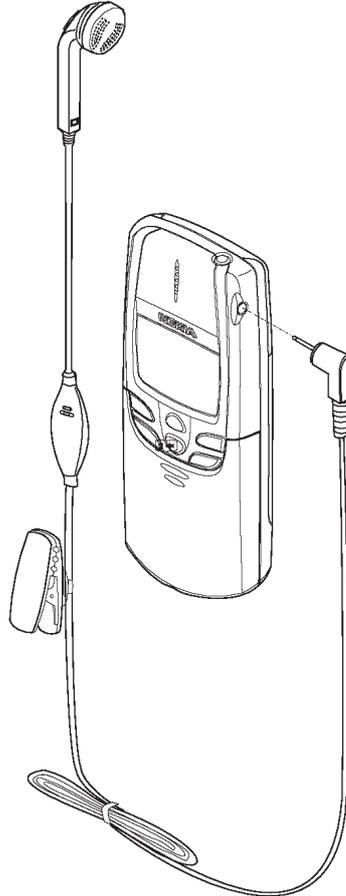

Product Code

Headset HDC-6:

0694057

This page intentionally left blank.