

PAMS Technical Documentation

NSE-5 Series Transceivers

Chapter 2

System Module

Contents

	Page No
System Connector	3 – 5
DC Connector	3 – 7
Slide Microphone	3 – 7
Slide Connector	3 – 7
Roller Interface	3 – 7
Keys and Keymatrix	3 – 7
Headset Connector	3 – 7
Battery Connector	3 – 14
Vibra Alerting Device	3 – 14
SIM Card Connector	3 – 15
Infrared Transceiver Module	3 – 16
Real Time Clock	3 – 17
Baseband Module	3 – 18
Technical Summary	3 – 18
Power Distribution	3 – 19
Power Up	3 – 22
Power up with a charger	3 – 22
Power Up With The Power Switch (PWRONX)	3 – 22
Power Up by RTC	3 – 23
Power Up by IBI	3 – 23
Acting Dead	3 – 23
Active Mode	3 – 23
Sleep Mode	3 – 24
Battery charging	3 – 24
Startup Charging	3 – 25
Battery Overvoltage Protection	3 – 25
Battery Removal During Charging	3 – 26
Different PWM Frequencies (1Hz and 32 Hz)	3 – 27
Battery Identification	3 – 28
Battery Temperature	3 – 29
Supply Voltage Regulators	3 – 30
Audio Control	3 – 31
Internal Microphone and Earpiece	3 – 32
External Audio Connections	3 – 32
Internal Audio Connections	3 – 34

4-wire PCM Serial Interface	3 – 34
Speech Processing	3 – 35
Alert Signal Generation	3 – 35
Digital Control	3 – 36
MAD2PR1	3 – 36
MAD2PR1 pinout	3 – 37
Memories	3 – 47
Program Memory 32MBit Flash	3 – 47
SRAM Memory	3 – 47
EEPROM Emulated in FLASH Memory	3 – 47
MCU Memory Requirements	3 – 48
Flash Programming	3 – 48
IBI Accessories	3 – 49
Phone Power-on by IBI	3 – 49
IBI power-on by phone	3 – 50
MCU Memory Map	3 – 51
RF Module	3 – 52
RF Frequency Plan	3 – 53
DC Regulators	3 – 54
Frequency Synthesizers	3 – 55
Receiver	3 – 56
Transmitter	3 – 59
AGC	3 – 62
AFC function	3 – 63
Interfacing	3 – 64
User Interface	3 – 65
LEDs	3 – 66
Plastic Window	3 – 66
Dust Seal	3 – 66
LCD Adhesive	3 – 66
Reflector	3 – 66
Connector	3 – 67
Light Guide	3 – 67
UI Module Connection to main PCB	3 – 68
Parts Lists	3 – 70

List of Figures.

Figure 1.	System Connector – module	3 – 5
Figure 2.	System Connector – detailed.	3 – 6
Figure 3.	Combined headset, system connector audio signals	3 – 13
Figure 4.	Battery connector locations	3 – 14
Figure 5.	Sim Card Reader Ultra phone	3 – 15
Figure 6.	IR transmission frame – example	3 – 16
Figure 7.	Block Diagram	3 – 19
Figure 8.	Baseband power distribution	3 – 20
Figure 9.	Battery Charging	3 – 24
Figure 10.	Battery Identification	3 – 28
Figure 11.	Battery Temperature	3 – 29
Figure 12.	Audio Control	3 – 31
Figure 13.	Combined headset and system connector audio signal	3 – 33
Figure 14.	IBI Power on	3 – 50
Figure 15.	Power Distribution	3 – 54
Figure 16.	Frequency Synthesisers	3 – 55
Figure 17.	Receiver Block Diagram	3 – 56
Figure 18.	Transmitter Block Diagram	3 – 59
Figure 19.	UI module assembled	3 – 65
Figure 20.	Mounting of LEDs for backlight. Seen from underside.	3 – 66
Figure 21.	Light guide.	3 – 67
Figure 22.	Marking specification for the light guide	3 – 68

Schematics/ Layouts

System Block Diagram	A – 1
RF and BB Interconnections	A – 2
Baseband Block	A – 3
Audio	A – 4
CPU	A – 5
Infrared Module	A – 6
Power	A – 7
User Interface	A – 8
CRFU3	A – 9
PA	A – 10
SUMMA	A – 11
Component Layout – Top	A – 12
Component Layout – Bottom	A – 13

System Connector

This section describes the electrical connection and interface levels between the baseband, RF and UI parts. The electrical interface specifications are collected into tables that cover a connector or a defined interface.

The system connector includes the following parts:

- DC connector for external plug-in charger and a desktop charger
- System connector for accessories and intelligent battery packs

The System connector is used to connect the transceiver to accessories. System connector pins can also be used to connect intelligent battery packs to the transceiver.

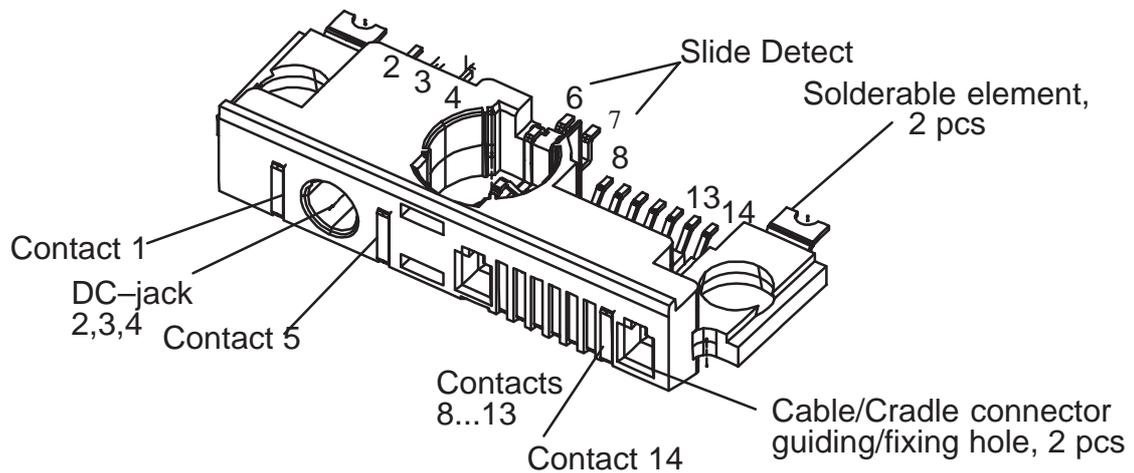


Figure 1. System Connector – module

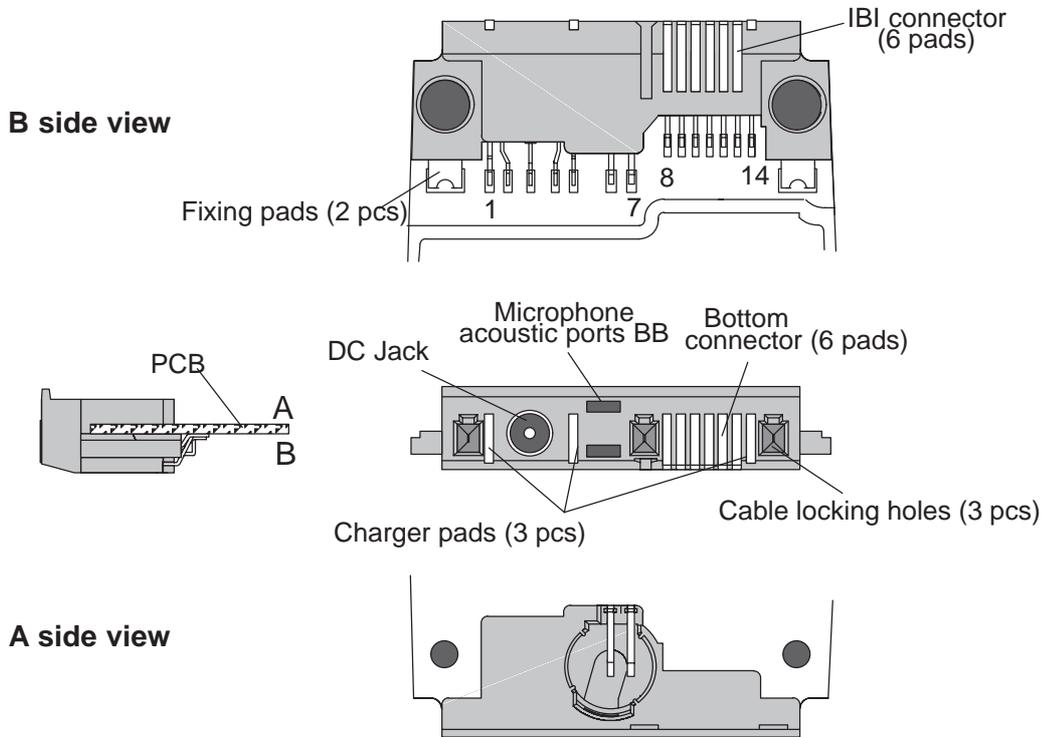


Figure 2. System Connector – detailed.

Table 1. System connector signals.

Pin	Name	Function	Description
1	V_IN	Bottom charger contacts	Charging voltage.
2	L_GND	DC Jack	Logic and charging ground.
3	V_IN	DC Jack	Charging voltage.
4	CHRG_CTRL	DC Jack	Charger control.
5	CHRG_CTRL	Bottom charger contacts	Charger control.
6	MIC-P	Slide Detect Holder	Slide Detect
7	MIC-N	Slide Detect Holder	Gnd
8	XMIC	Bottom & IBI connectors	Analog audio input.
9	SGND	Bottom & IBI connectors	Audio signal ground.
10	XEAR	Bottom & IBI connectors	Analog audio output.
11	MBUS	Bottom & IBI connectors	Bidirectional serial bus.

**Table 1. System connector signals.
(continued)**

Pin	Name	Function	Description
12	FBUS_RX	Bottom & IBI connectors	Serial data in.
13	FBUS_TX	Bottom & IBI connectors	Serial data out.
14	L_GND	Bottom charger contacts	Logic and charging ground.

DC Connector

The electrical specifications in NO TAG shows the idle voltage produced by the acceptable chargers at the DC connector input. The absolute maximum input voltage is 18V due to the transient suppressor that is protecting the charger input.

Slide Microphone

The microphone is connected to the slide by means of springs it has a microphone input level specified in NO TAG. The microphone requires bias current to operate which is generated by the COBBA_GJP ASIC.

Slide Connector

An Interrupt signal to MAD2PR1 determines whether the slide is in an open or closed position.

Roller Interface

A mechanical solution is implemented and three interrupts are fed to the MAD2PR1

Keys and Keypad

0-9, *, #, send, end, soft_1, soft_2, power_on_off, roller_push,

Headset Connector

The external headset device is connected to the system connector, from which the signals are routed to COBBA_GJP microphone inputs and earphone outputs.

Table 2. Mic signals of the system connector

NA	MICN mounted in slide	0	2	12.5	mV	Connected to COBBA_GJP MIC2N input. The maximum value corresponds to 1 kHz, 0 dBmO network level with input amplifier gain set to 32 dB. typical value is maximum value – 16 dB.
NA	MICP mounted in slide	0	2	12.5	mV	Connected to COBBA_GJP MIC2P input. The maximum value corresponds to 1 kHz, 0 dBmO network level with input amplifier gain set to 32 dB. typical value is maximum value – 16 dB.

Table 3. System/IBI connector

Pin	IB-pin	Name	Function	Min	Typ	Max	Unit	Description
10	Yes	XEAR	Analog audio output (from phone to accessory)		47		Ω	Output AC impedance (ref. GND) resistor tol. is 5%
					10		μF	Series output capacitance
				16		300	Ω	Load AC impedance to GND : Headset
				4.7	10		$\text{k}\Omega$	Load AC impedance to SGND : External accessory.
					1.0		$\text{V}_{\text{p-p}}$	Max. output level. No load
					100		$\text{k}\Omega$	Resistance to accessory ground (in accessory)
			Accessory detection (from accessory to phone)		0.5		V	DC Voltage (ref. SGND). External accessory
					6.8		$\text{k}\Omega$	Load DC resistance to SGND . External accessory
				0		0.2	V	DC Voltage (ref. SGND). Headset with closed switch
				16		1500	Ω	Load DC resistance to SGND . Headset with closed switch
					2.8		V	DC Voltage (ref. SGND). No accessory, or headset with open switch
					47		$\text{k}\Omega$	Pull-up resistor to VBB in phone

Table 3. System/IBI connector (continued)


Pin	IB-pin	Name	Function	Min	Typ	Max	Unit	Description
8	Yes	XMIC	Analog audio input (from accessory to phone)	2.0		2.2	k Ω	Input AC impedance
					100		Ω	Accessory source AC impedance
						1	V _{p-p}	Maximum signal level
			Headset microphone input (from accessory to phone)	2.0		2.2	k Ω	Input AC impedance
					2.5		k Ω	Headset source AC impedance
				100		600	μ A	Bias current
			Accessory mute. Voltage compared to SGND . (from phone to accessory)			200	mV _{p-p}	Maximum signal level
				2.5		2.9	V	Not muted
				0		1.55	V	Muted, without headset
			Headset detection (from accessory to phone) (NO TAG)	1.6	2.0	2.4	V	Comparator reference in accessory
				1.47		2.9	V	No headset (ref. SGND).
				0		1.33	V	Headset connected (ref. SGND).
				49		k Ω	Pull-up resistor to VBB in phone	
			9	Yes	SGND	Audio signal ground. Separated from phone GND (from phone to accessory)		47
	10						μ F	Series output capacitance
	380						Ω	Resistance to phone ground (DC) (in phone)
	100						k Ω	Resistance to accessory ground (in accessory)
-0.2		+0.2					V	DC voltage compared to phone GND
-5		+5					V	DC voltage compared to accessory GND

Table 3. System/IBI connector (continued)

Pin	IB-pin	Name	Function	Min	Typ	Max	Unit	Description
13	Yes	FBUS_TX	Serial data out (from phone to accessory)	0.1		0.8	V	Output low voltage @ $I_{OL} \leq 4$ mA (ref. GND)
				1.7		2.8	V	Output high voltage @ $I_{OH} \leq 4$ mA (ref. GND)
					47		k Ω	Pull-up resistor in phone
					220		k Ω	Pull-down resistor in accessory
					47	100	Ω	Serial (EMI filtering) resistor in phone
						150	pF	Cable capacitance
						1	μ s	Rise/Fall time
12	Yes	FBUS_RX	Serial data in (from accessory to phone)	0		0.8	V	Input low voltage (ref. GND)
				2.0		2.8	V	Input high voltage (ref. GND)
					220		k Ω	Pull-down resistor in phone
					47		k Ω	Pull-up resistor in accessory
					2.2		k Ω	Serial (EMI filtering) resistor in accessory
						150	pF	Cable capacitance
						2	μ s	Rise/Fall time @ 115kbits/s
		1	μ s	Rise/Fall time @ 230kbits/s				
11	Yes	MBUS	Bidirectional serial bus	0		0.8	V	Input low voltage (ref. GND)
				2.0		2.8	V	Input high voltage (ref. GND)
		FLASH_CLOCK	Flash serial data clock (from accessory to phone)	0		0.8	V	Output low voltage @ $I_{OL} \leq 4$ mA (ref. GND)
				2.1		2.9	V	Output high voltage @ $I_{OH} \leq 100$ μ A (ref. GND)
					4.7		k Ω	Pull-up resistor in phone
					220		k Ω	Pull-down resistor in accessory
					100		Ω	Serial (EMI filtering) resistor in phone
						200	pF	Cable capacitance
						5	μ s	Rise/Fall time @ 9600 bits/s

Table 3. System/IBI connector (continued)

Pin	IB-pin	Name	Function	Min	Typ	Max	Unit	Description	
2, 14	–	L_GND	Logic and charging ground (separated from phone GND by EMI components)	0		1.0	A	Ground current	
4,5	–	CHRG_CTRL	Charger control (from phone to accessory)	0		0.8	V	Output low voltage @ $I_{OL} \leq 20 \mu A$	
				1.7		2.9	V	Output high voltage @ $I_{OH} \leq 20 \mu A$	
					32	37	Hz	PWM frequency	
				1		99	%	PWM duty cycle	
					20		k Ω	Serial (EMI filtering) resistor in phone	
					30		k Ω	Pull-down resistor in phone	
1,3	–	VIN	Fast charger (from accessory to phone)	0		8.5	V	Charging voltage.	
				0		0.85	A	Charging current.	
						100	mV-p-p	Ripple voltage @ $f = 20 \dots 200 \text{ Hz}$, load = 3 & 10 Ω	
						100	mV-p-p	Ripple voltage @ $f = 0.2 \dots 30 \text{ kHz}$, load = 3 & 10 Ω	
						100	mV-p-p	Ripple voltage @ $f > 30 \text{ kHz}$, load = 3 & 10 Ω	
						200	mV-p-p	Total ripple voltage @ $f > 20 \text{ Hz}$, load = 3 & 10 Ω	
					0		15	V _{peak}	Charging voltage (max. = unloaded, +20 % overvoltage in mains).
					0		1.0	A _{peak}	Charging current (max. = shorted, +20 % overvoltage in mains).

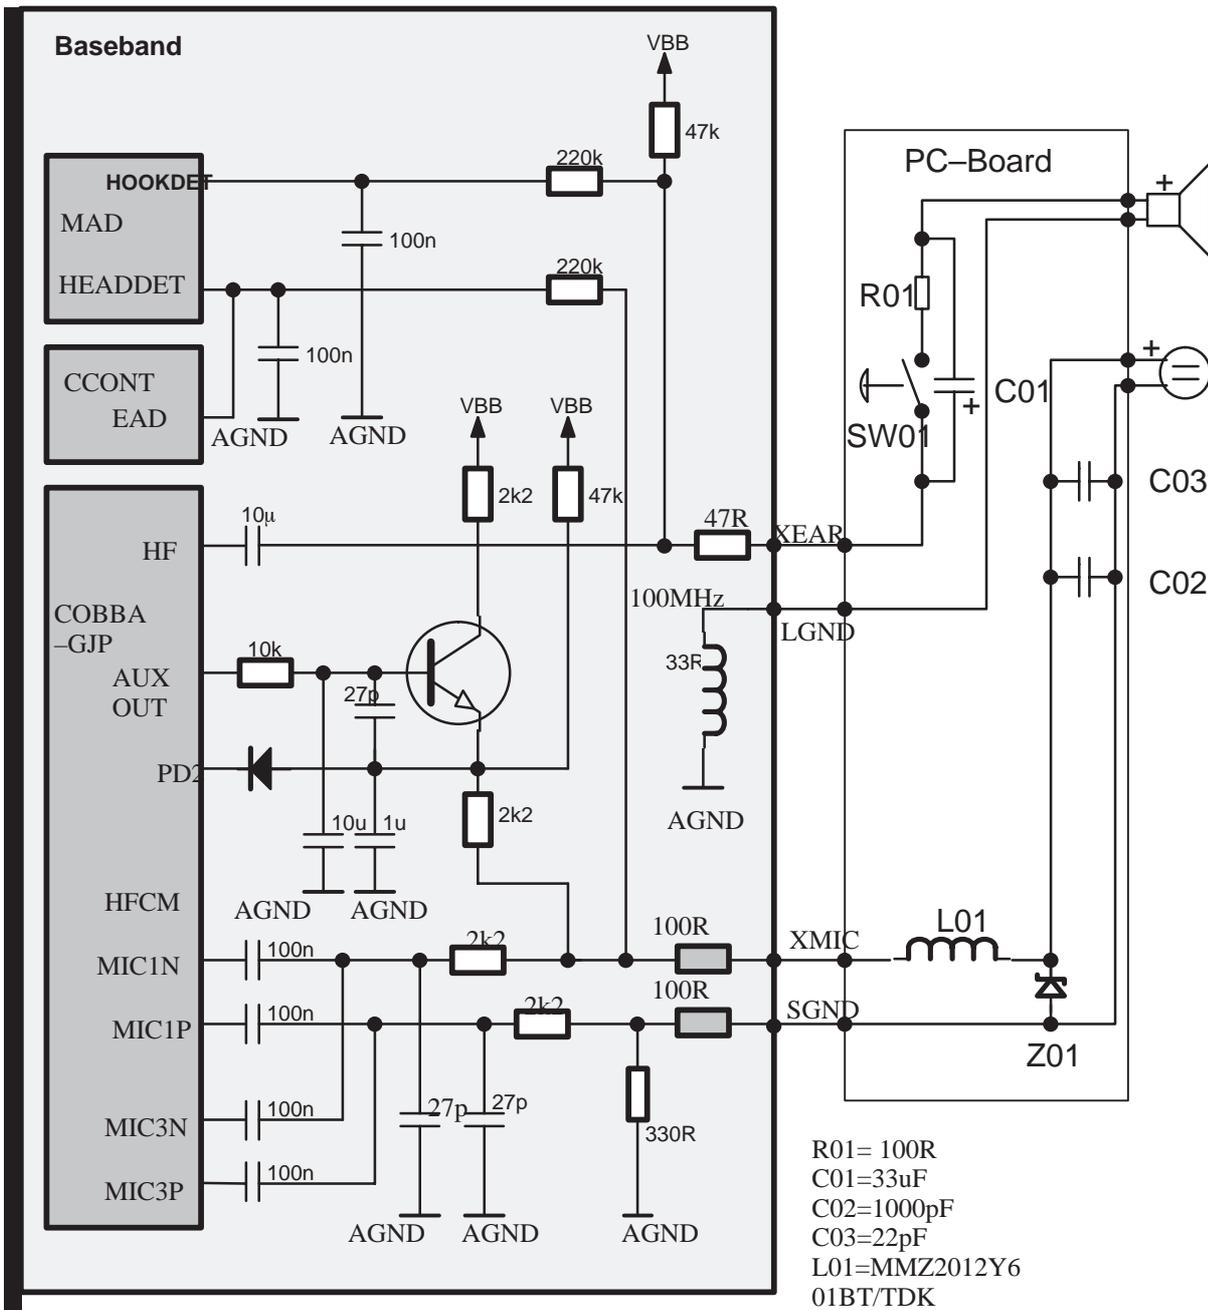

Note 1: Grey resistor are in the border of "EMI clean" and "dirty" areas.
 Note 2: AGND is connected directly to the GND on PCB close to HF parts.
 Note 3: ESD protection diodes are not shown.

Figure 3. Combined headset, system connector audio signals

Battery Connector

The BSI contact on the battery connector is used to detect when the battery is removed with power switched on enabling the SIM card operation to shut down first. The BSI contact in the battery pack should be shorter than the supply power contacts to give enough time for the SIM shut down.

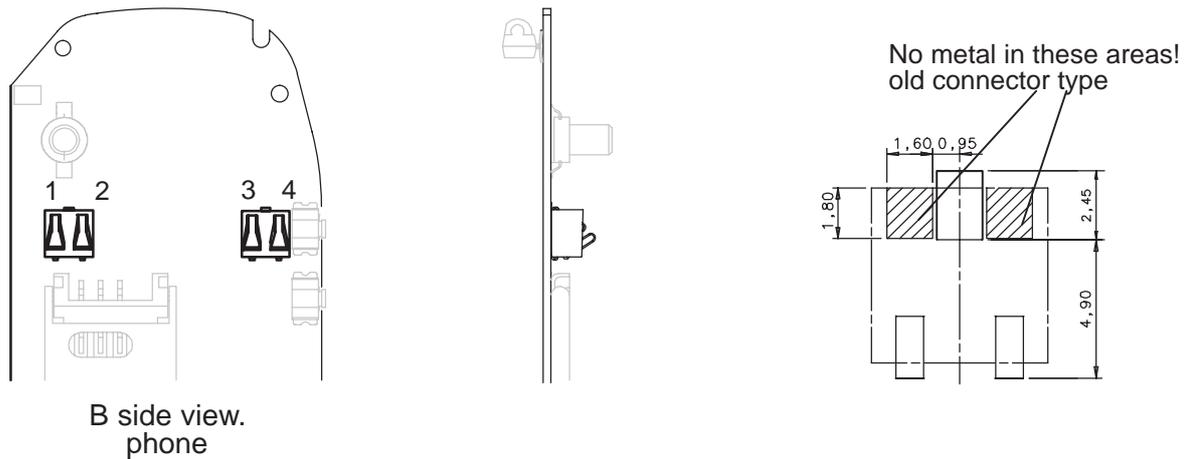


Figure 4. Battery connector locations

1	+VBATT
2	BSI
3	BTEMP
4	-VBATT

Vibra Alerting Device

A vibra alerting device is used to give a silent signal to the user of an incoming call it is mounted in the B-cover. A special battery pack contains a vibra motor. The vibra is controlled with one PWM signal by the MAD2PR1 via the BTEMP battery terminal.

SIM Card Connector

The SIM card connector is located on the PCB. Only small SIM cards are supported.

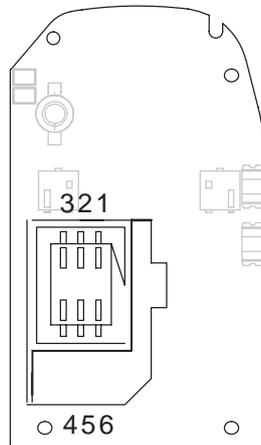


Figure 5. Sim Card Reader Ultra phone

Table 4. SIM Connector Electrical Specifications

Pin	Name	Parameter	Min	Typ	Max	Unit	Notes
1	GND	GND	0		0	V	Ground
2	VSIM	5V SIM Card 3V SIM Card	4.8 2.8	5.0 3.0	5.2 3.2	V	Supply voltage
3	DATA	5V Vin/Vout 3V Vin/Vout	4.0 0 2.8 0	"1" "0" "1" "0"	VSIM 0.5 VSIM 0.5	V	SIM data Trise/Tfall max 1us
4	SIMRS T	5V SIM Card 3V SIM Card	4.0 2.8	"1" "1"	VSIM VSIM	V	SIM reset
5	SIMCL K	Frequency Trise/Tfall		3.25		MHz ns	SIM clock
6	VPP	5V SIM Card 3V SIM Card	4.8 2.8	5.0 3.0	5.2 3.2	V	Programming voltage pin6 and pin2 tied together

VSIM supply voltages are specified to meet type approval requirements regardless the tolerances in components.

Infrared Transceiver Module

An infrared transceiver module is designed as a substitute for hardwired connections between the phone and a PC. The infrared transceiver module is a stand alone component. In DCT3 the module is located inside and at the top of the phone.

The Rx and Tx is connected to the FBUS via a dual bus buffer. The module and buffer is activated from the MAD2_pr1 with a pull up on IRON. The Accif in MAD2_pr1 performs pulse encoding and shaping for transmitted data pulses and detection and decoding for received data pulses.

The data is transferred over the IR link using serial FBUS data at speeds 9.6, 19.2, 38.4, 57.6 or 115.2 kbits/s, which leads to maximum throughput of 92.160 kbits/s. The used IR module complies with the IrDA SIR specification (Infra Red Data Association), which is based on the HP SIR (Hewlett-Packard's Serial Infra Red) concept.

The Following figure gives an example of IR transmission pulses. In IR transmission a light pulse correspondes to 0-bit and a "dark pulse" correspondes to 1-bit.

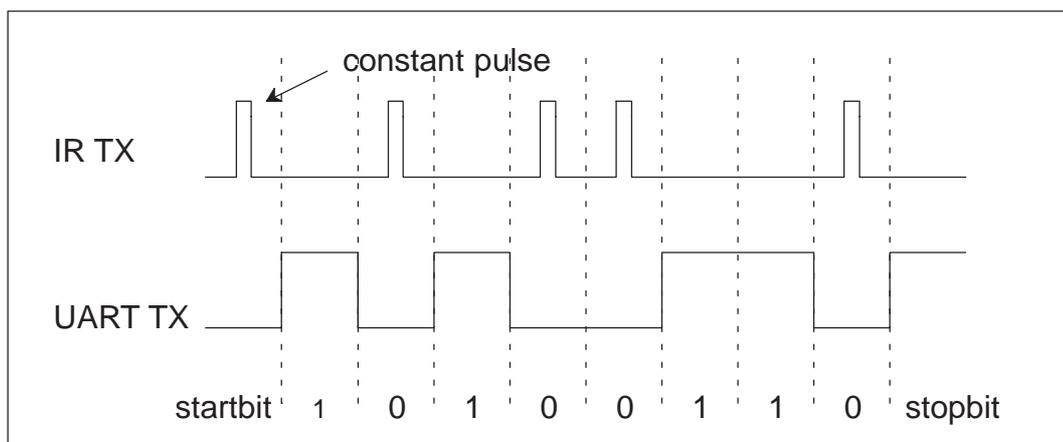


Figure 6. IR transmission frame – example

The FBUS cannot be used for external accessory communication, when the infrared mode is selected. Infrared communication reserves the FBUS completely.

Real Time Clock

Requirements for a real time clock implementation are a basic clock (hours and minutes), a calendar and a timer with alarm and power on/off-function and miscellaneous calls. The RTC will contain only the time base and the alarm timer but all other functions (e.g. calendar) will be implemented with the MCU software. The RTC needs a power backup to keep the clock running when the phone battery is disconnected. The backup power is supplied from a rechargeable polyacene battery that can keep the clock running for approximately ten minutes. If the backup has expired, the RTC clock restarts after the main battery is connected. The CCONT resets the MCU in approx 62ms and the 32kHz source is settled (after approx. 1s).

The CCONT is an ideal place for an integrated real time clock as the asic already contains the power up/down functions and a sleep control with the 32kHz sleep clock, which is always running when the phone battery is connected. This sleep clock is used for a time source to a RTC block.

Baseband Module

Technical Summary

The baseband architecture is basically similar to DCT3 GSM phones. DCT3.5 differs from DCT3 in the single pcb concept and the serial interface between MAD2PR1 and COBBA_GJP and MAD2PR1 and CCONT. In DCT3.5 the MCU, the system specific ASIC and the DSP are intergrated into one ASIC, called the MAD2PR1 chip, which takes care of all the signal processing and operation controlling tasks of the phone.

The baseband architecture supports a power saving function called "sleep mode". This sleep mode shuts off the VCTCXO, which is used as system clock source for both RF and baseband. During the sleep mode the system runs from a 32 kHz crystal. The phone is waken up by a timer running from this 32 kHz clock supply. The sleeping time is determined by some network parameters. When the sleep mode is entered both the MCU and the DSP are in standby mode and the normal VCTCXO clock has been switched off.

The battery voltage range in DCT3 family is 3.0V to 4.5V depending on the battery charge and used cell type (Li-Ion or NiMH). Because of the lower battery voltage the baseband supply voltage is lowered to a nominal of 2.8V.

The baseband is running from a 2.8V power rail which is supplied by a power controlling asic (CCONT). In the CCONT there are seven individually controlled regulator outputs for the RF section, one 2.8V output for the baseband plus a core voltage for MAD2PR1. However this is not used in NSE-5 because the chipset supports 2.8Volts. In addition there is one +5V power supply output(V5V). TheCCONTalso contains a SIM interface which supports both 3V and 5V SIM cards. A real time clock function is integrated into the CCONT which utilises the same 32KHz clock supply as the sleep clock. A backup power supply is provided for the RTC which keeps the real time clock running when the main battery is removed. The backup power supply is a rechargeable polyacene battery with a backup time of ten minutes.

The interface between the baseband and the RF section is handled by a specific asic. The COBBA_GJP asic provides A/D and D/A conversion of the in-phase and quadrature receive and transmit signal paths and also A/D and D/A conversions of received and transmitted audio signals to and from the UI parts. Data transmission between the COBBA_GJP and the MAD2PR1 is implemented using serial connections. Digital speech processing is handled by the MAD2PR1 asic. The COBBA_GJP asic is a dual supply voltage circuit, the digital parts are running from the baseband supply VBB and the analog parts are running from the analog supply VCOBBA (VR6).

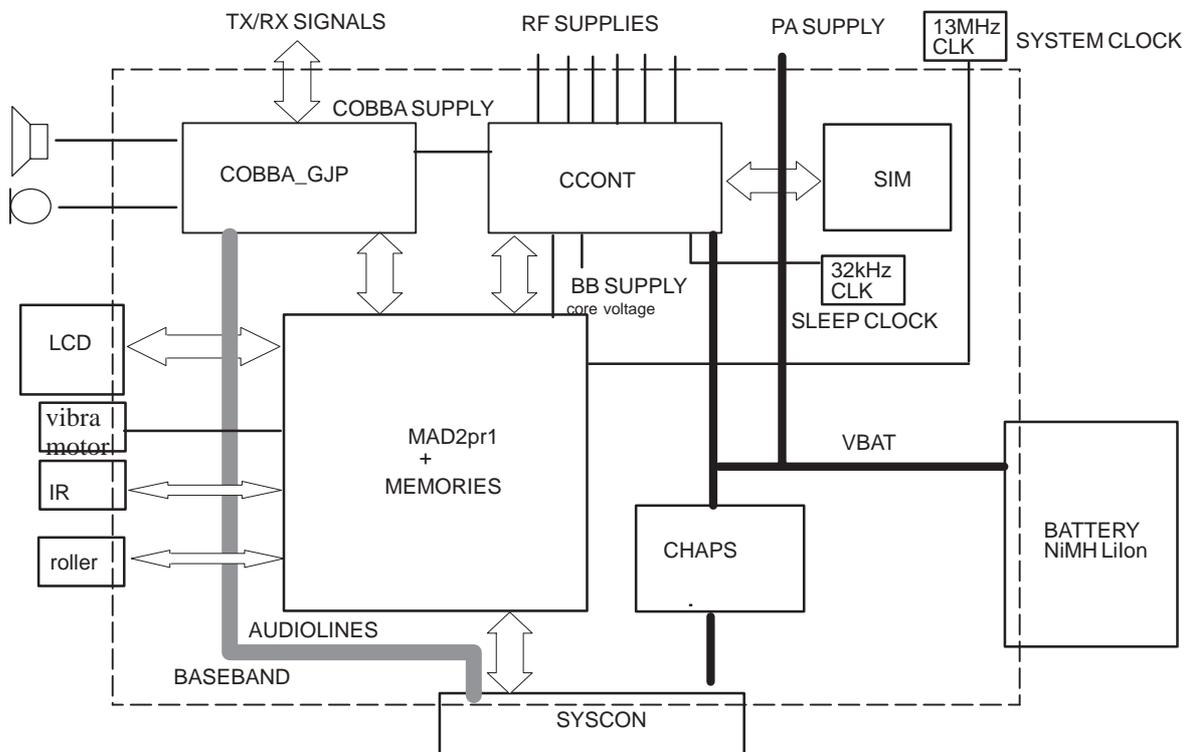


Figure 7. Block Diagram

Power Distribution

In normal operation the baseband is powered from the phone's battery. The battery consists of one Lithium-Ion cell. There is also a possibility to use batteries consisting of three Nickel Metal Hydride cells or one Solid state cell. An external charger can be used for recharging the battery and supplying power to the phone. The charger can be either so called fast charger, which can deliver supply current up to 1600 mA or a standard charger that can deliver approx 300 mA.

The CCONT provides voltage to the circuitry excluding the RF PA, LCD and IrDa which are supplied via a continuous power rail direct from the battery. The RF PA module has a cutoff voltage of 3.1V. The battery (see note) feeds power directly to several parts of the system: CCONT, PA and UI circuitry (display lights, buzzer). The four dedicated control lines, RxPwr, TxPwr, SIMCardPwr and SynthPwr from MAD2 to CCONT have changed to a serial control signal between MAD2PR1 and CCONT. Figure 8 shows a simplified block diagram of the power distribution.

Note : In battery terms there is VBATT and VB, the difference is a filter (coil and capacitors)

CCONT supply a core voltage to the MAD2PR1. The core voltage is by default 1.975V.

RAM backup as in PDC3 phone.

CCONT generates also a 1.5 V reference voltage VREF to COBBA_GJP, SUMMA. The VREF voltage is also used as a reference to some of the CCONT A/D converters and as a reference for all the other regulators.

In addition to the above mentioned signals MAD2PR1 includes also TXP control signal which goes to SUMMA power control block and to the power amplifier. The transmitter power control TXC is led from COBBA_GJP to SUMMA.

Table 5. CCONT current output capability/ nominal voltage

Regulator	Maximum current	Unit	Vout	Unit	Notes
VR1	25	mA	2.8	V	VCTCXO
VR2	25	mA	2.8	V	CRFU Rx
VR3/switch	50	mA	2.8	V	PLL VSYN
VR4	90	mA	2.8	V	VCO VSYN
VR5	80	mA	2.8	V	PLUSSA Rx
VR6	100	mA	2.8	V	COBBA_GJP
VR7	150	mA	2.8	V	PLUSSA+CRFU Tx
VBB ON	125	mA	2.8	V	current limit 250mA current limit 5mA
VBB SLEEP	1	mA	2.8	V	
VSIM	30	mA	3.0/ 5.0	V V	VSIM output voltage selectable
V_core	50	mA	1.975	V	programmable core supply for cpu/dsp/sys asic dV=225mV
V_RAM_bck/ VR3	50	mA	2.8	V	nomal mode 2.8V. 2.0V for data retention.

VSIM must fulfill the GSM11.10 current spike requirements.

VSIM and V5V can give a total of 30 mA.

Power Up

The baseband is powered up by:

1. Pressing the power key, that generates a PWRONX interrupt signal from the power key to the CCONT, which starts the power up procedure.
2. Connecting a charger to the phone. The CCONT recognizes the charger from the VCHAR voltage and starts the power up procedure.
3. A RTC interrupt. If the real time clock is set to alarm and the phone is switched off, the RTC generates an interrupt signal, when the alarm is gone off. The RTC interrupt signal is connected to the PWRONX line to give a power on signal to the CCONT just like the power key.
4. A battery interrupt. Intelligent battery packs have a possibility to power up the phone. When the battery gives a short (10ms) voltage pulse through the BTEMP pin, the CCONT wakes up and starts the power on procedure.


Power up with a charger

When the charger is connected CCONT will switch on the CCONT digital voltage as soon as the battery voltage exceeds 3.0V. The reset for CCONT's digital parts is released when the operating voltage is stabilized (50 us from switching on the voltages). Operating voltage for VCXO is also switched on. The counter in CCONT digital section will keep MAD in reset for 62 ms (PURX) to make sure that the clock provided by VCXO is stable. After this delay MAD reset is released, and VCXO –control (SLEEPX) is given to MAD. The diagram assumes empty battery, but the situation would be the same with full battery:

When the phone is powered up with an empty battery pack using the standard charger, the charger may not supply enough current for standard powerup procedure and the powerup must be delayed.

Power Up With The Power Switch (PWRONX)

When the power on switch is pressed the PWRONX signal will go low. CCONT will switch on the CCONT digital section and VCXO as was the case with the charger driven power up. If PWRONX is low when the 64 ms delay expires, PURX is released and SLEEPX control goes to MAD. If PWRONX is not low when 64 ms expires, PURX will not be released, and CCONT will go to power off (digital section will send power off signal to analog parts)

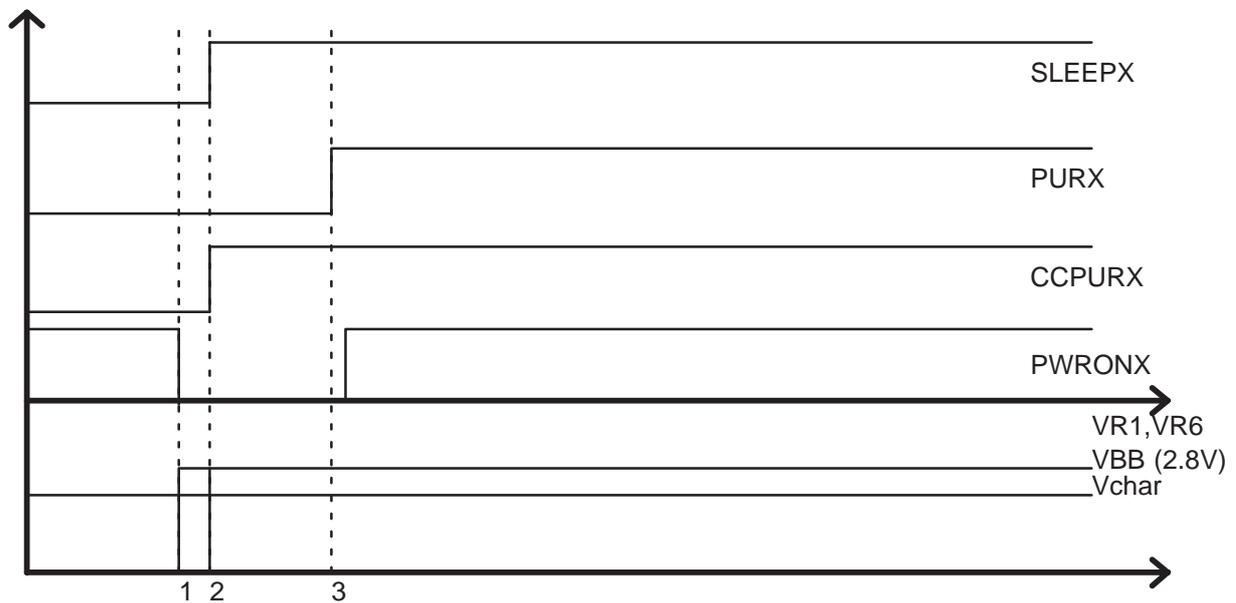

- 1: Power switch pressed ==> Digital voltages on in CCONT (VBB)
- 2: CCONT digital reset released. VCXO turned on
- 3: 62 ms delay to see if power switch is still pressed.

Power Up by RTC

RTC (internal in CCONT) can power the phone up by changing RTCPwr to logical "1". RTCPwr is an internal signal from the CCONT digital section.

Power Up by IBI

IBI can power CCONT up by sending a short pulse to logical "1". RTCPwr is an internal signal from the CCONT digital section.

Acting Dead

If the phone is off when the charger is connected, the phone is powered on but enters a state called "acting dead". To the user the phone acts as if it was switched off. A battery charging alert is given and/or a battery charging indication on the display is shown to acknowledge the user that the battery is being charged.

Active Mode

In the active mode the phone is in normal operation, scanning for channels, listening to a base station, transmitting and processing information. All the CCONT regulators are operating. There are several substates in the active mode depending on if the phone is in burst reception, burst transmission, if DSP is working etc..

Sleep Mode

In the sleep mode all the regulators except the baseband VBB, Vcore and the SIM card VSIM regulators are off. Sleep mode is activated by the MAD2PR1 after MCU and DSP clocks have been switched off. The voltage regulators for the RF section are switched off and the VCXO power control, VCXOPwr is set low. In this state only the 32 kHz sleep clock oscillator in CCONT is running. The flash memory power down input is connected to the VCXO power control, so that the flash is deep powered down during sleep mode.

The sleep mode is exited either by the expiration of a sleep clock counter in the MAD2PR1 or by some external interrupt, generated by a charger connection, key press, headset connection etc. The MAD2PR1 starts the wake up sequence and sets the VCXOPwr control high. After VCXO settling time other regulators and clocks are enabled for active mode.

If the battery pack is disconnect during the sleep mode, the CCONT shall power down the SIM in the sleep mode as there is no time to wake up the MCU.

Battery charging

The electrical specifications give the idle voltages produced by the acceptable chargers at the DC connector input. The absolute maximum input voltage is 30V due to the transient suppressor that is protecting the charger input. At phone end there is no difference between a plug-in charger or a desktop charger. The DC-jack pins and bottom connector charging pads are connected together inside the phone.

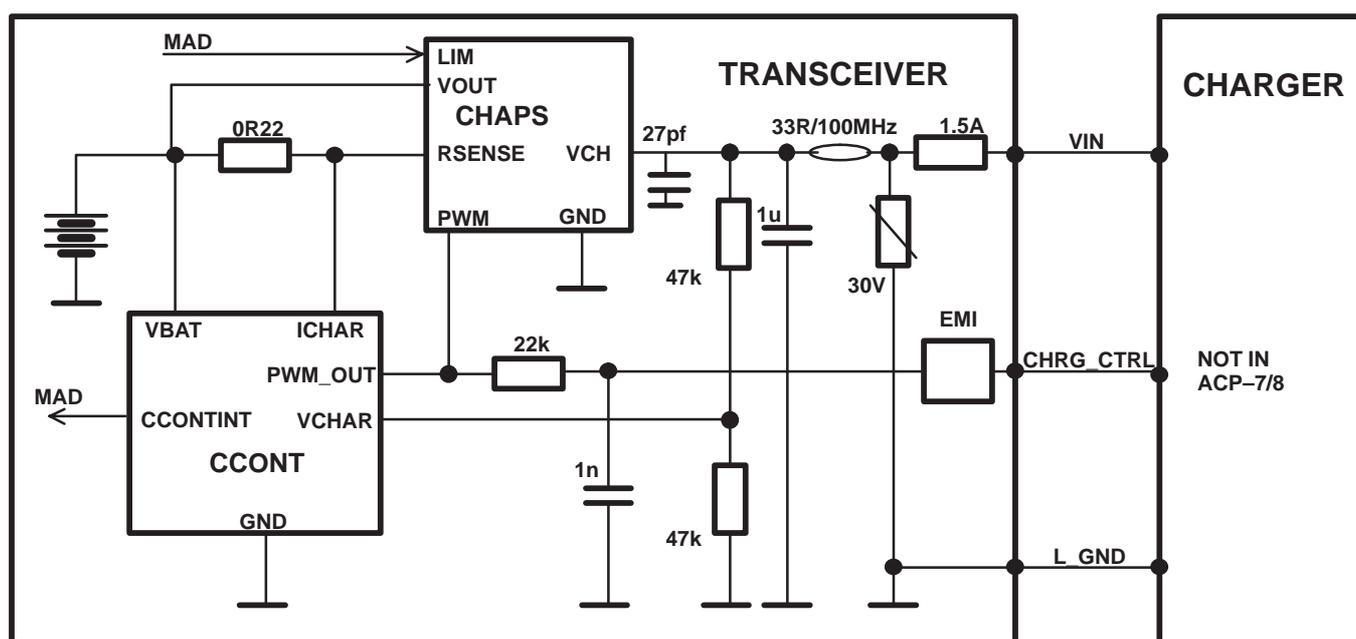


Figure 9. Battery Charging

Startup Charging

When a charger is connected, the CHAPS is supplying a startup current minimum of 130mA to the phone. The startup current provides initial charging to a phone with an empty battery. Startup circuit charges the battery until the battery voltage level is reaches 3.0V (+/- 0.1V) and the CCONT releases the PURX reset signal and program execution starts. Charging mode is changed from startup charging to PWM charging that is controlled by the MCU software. If the battery voltage reaches 3.55V (3.75V maximum) before the program has taken control over the charging, the startup current is switched off. The startup current is switched on again when the battery voltage is sunken 100mV (nominal).

Table 6.

Parameter	Symbol	Min	Typ	Max	Unit
VOUT Start- up mode cutoff limit	Vstart	3.45	3.55	3.75	V
VOUT Start- up mode hysteresis NOTE: Cout = 4.7 uF	Vstarhys	80	100	200	mV
Start-up regulator output current VOUT = 0V ... Vstart	Istart	130	165	200	mA

Battery Overvoltage Protection


Output overvoltage protection is used to protect phone from damage. This function is also used to define the protection cutoff voltage for different battery types (Li or Ni). The power switch is immediately turned OFF if the voltage in VOUT rises above the selected limit VLIM1 or VLIM2.

Table 7.

Parameter	Symbol	LIM input	Min	Typ	Max	Unit
Output voltage cutoff limit (during transmission or Li- battery)	VLIM1	LOW	4.4	4.6	4.8	V
Output voltage cutoff limit (no transmission or Ni-bat- tery)	VLIM2	HIGH	4.8	5.0	5.2	V

The voltage limit (VLIM1 or VLIM2) is selected by logic LOW or logic HIGH on the CHAPS (N101) LIM- input pin. Default value is lower limit VLIM1.


When the switch in output overvoltage situation has once turned OFF, it stays OFF until the the battery voltage falls below VLIM1 (or VLIM2) and PWM = LOW is detected. The switch can be turned on again by setting PWM = HIGH.

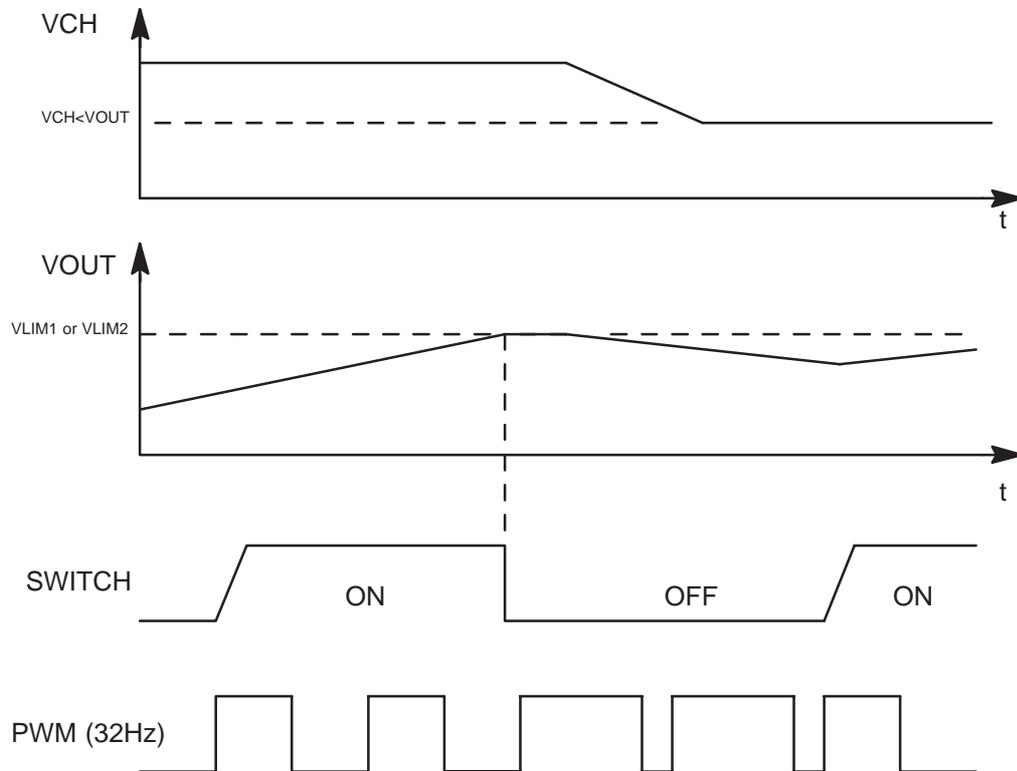

Battery Removal During Charging

Output overvoltage protection is also needed in case the main battery is removed when charger connected or charger is connected before the battery is connected to the phone.

With a charger connected, if V_{OUT} exceeds V_{LIM1} (or V_{LIM2}), CHAPS turns switch OFF until the charger input has sunken below V_{por} (nominal 3.0V, maximum 3.4V). MCU software will stop the charging (turn off PWM) when it detects that battery has been removed. The CHAPS remains in protection state as long as PWM stays HIGH after the output overvoltage situation has occurred.

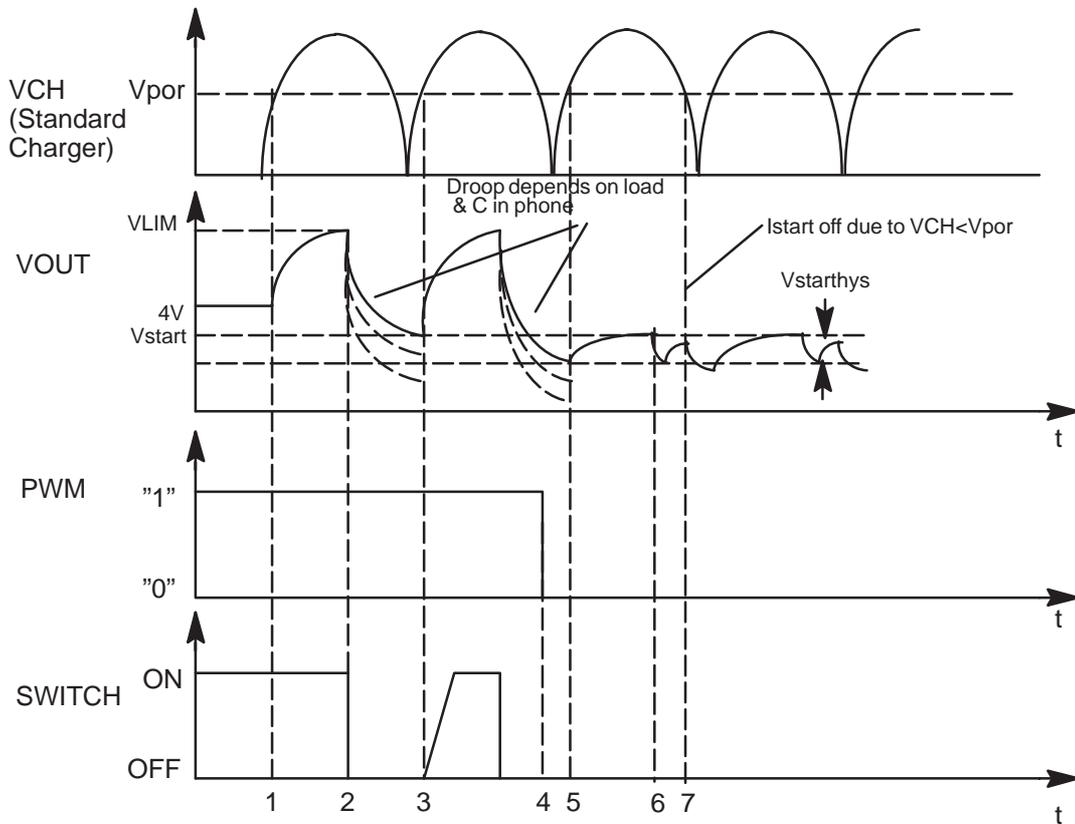


1. Battery removed, (standard) charger connected, VOUT rises (follows charger voltage)
2. VOUT exceeds limit VLIM(X), switch is turned immediately OFF
3. VOUT falls (because no battery), also VCH < Vpor (standard chargers full-rectified output). When VCH > Vpor and VOUT < VLIM(X) → switch turned on again (also PWM is still HIGH) and VOUT again exceeds VLIM(X).
4. Software sets PWM = LOW → CHAPS does not enter PWM mode
5. PWM low → Startup mode, startup current flows until Vstart limit reached
6. VOUT exceeds limit Vstart, Istart is turned off
7. VCH falls below Vpor

Different PWM Frequencies (1Hz and 32 Hz)

When a travel charger (2- wire charger) is used, the power switch is turned ON and OFF by the PWM input when the PWM rate is 1Hz. When PWM is HIGH, the switch is ON and the output current $I_{out} = I_{charger} - I_{CHAPS}$. When PWM is LOW, the switch is OFF and the output current $I_{out} = 0$. To prevent the switching transients inducing noise in audio circuitry of the phone soft switching is used.

The performance travel charger (3- wire charger) is controlled with PWM at a frequency of 32Hz. When the PWM rate is 32Hz CHAPS keeps the power switch continuously in the ON state.

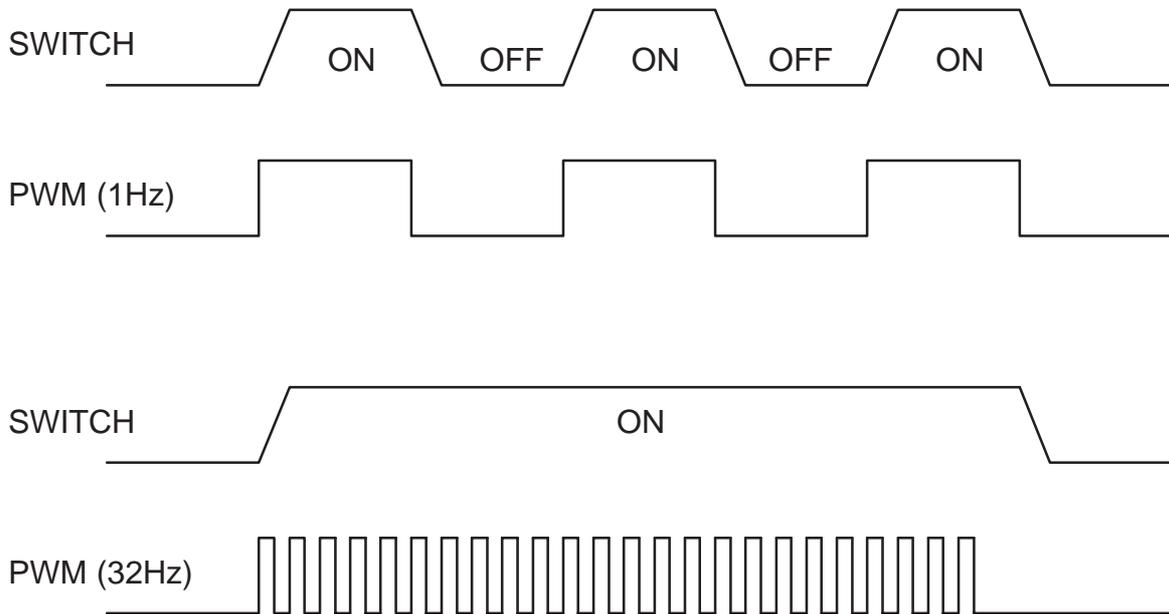

Battery Identification

Different battery types are identified by a pulldown resistor inside the battery pack. The BSI line inside transceiver has a 100k pullup to Vbb. The MCU can identify the battery by reading the BSI line DC-voltage level with a CCONT (N100) A/D-converter.


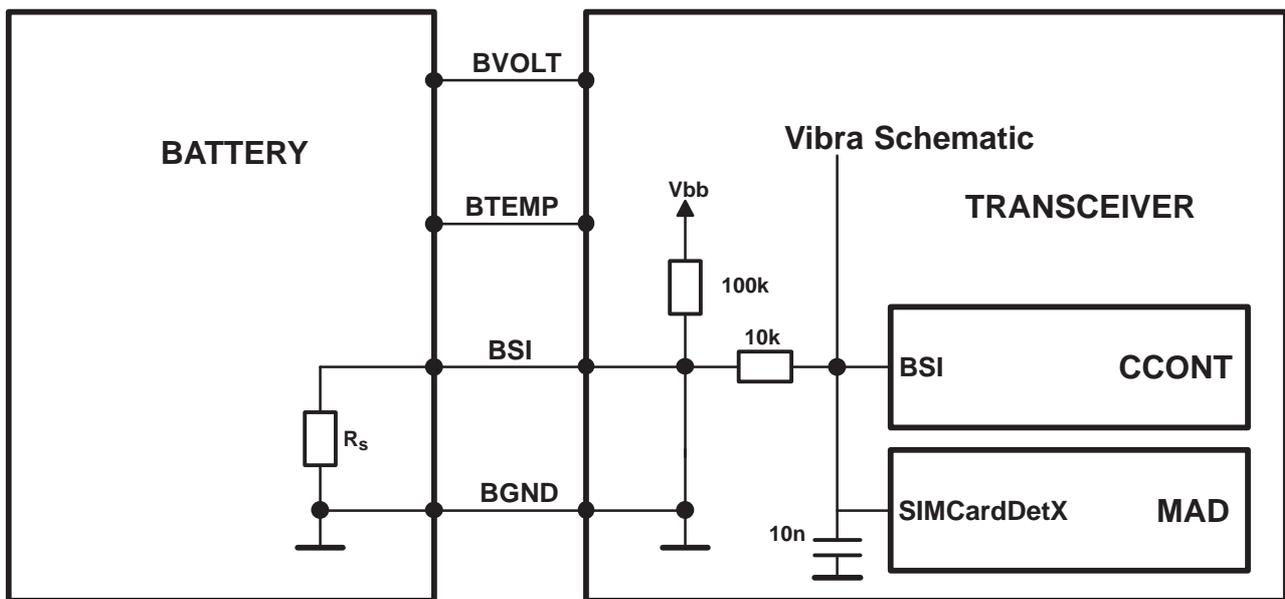


Figure 10. Battery Identification

The battery identification line is used also for battery removal detection. The BSI line is connected to a SIMCardDetX line of MAD2 (D200). SIMCardDetX is a threshold detector with a nominal input switching level $0.85 \times V_{cc}$ for a rising edge and $0.55 \times V_{cc}$ for a falling edge. The battery removal detection is used as a trigger to power down the SIM card before the power is lost. The BSI contact in the battery pack is made 0.7mm shorter than the supply voltage contacts so that there is a delay between battery removal detection and supply power off,

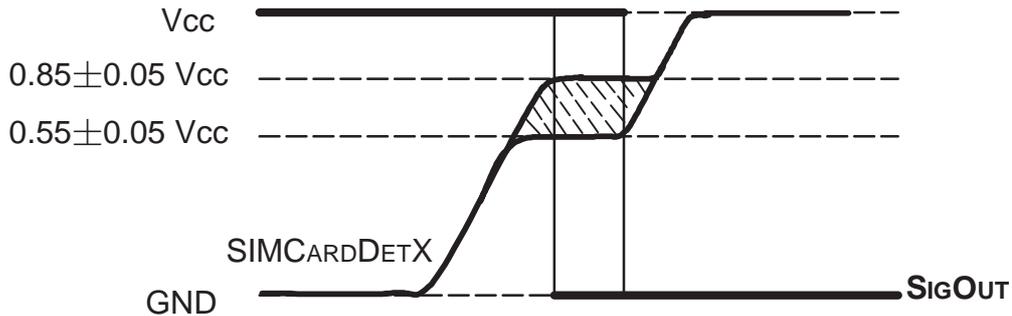

Battery Temperature

The battery temperature is measured with a NTC inside the battery pack. The BTEMP line inside transceiver has a 100k pullup to VREF. The MCU can calculate the battery temperature by reading the BTEMP line DC-voltage level with a CCONT (N100) A/D-converter.

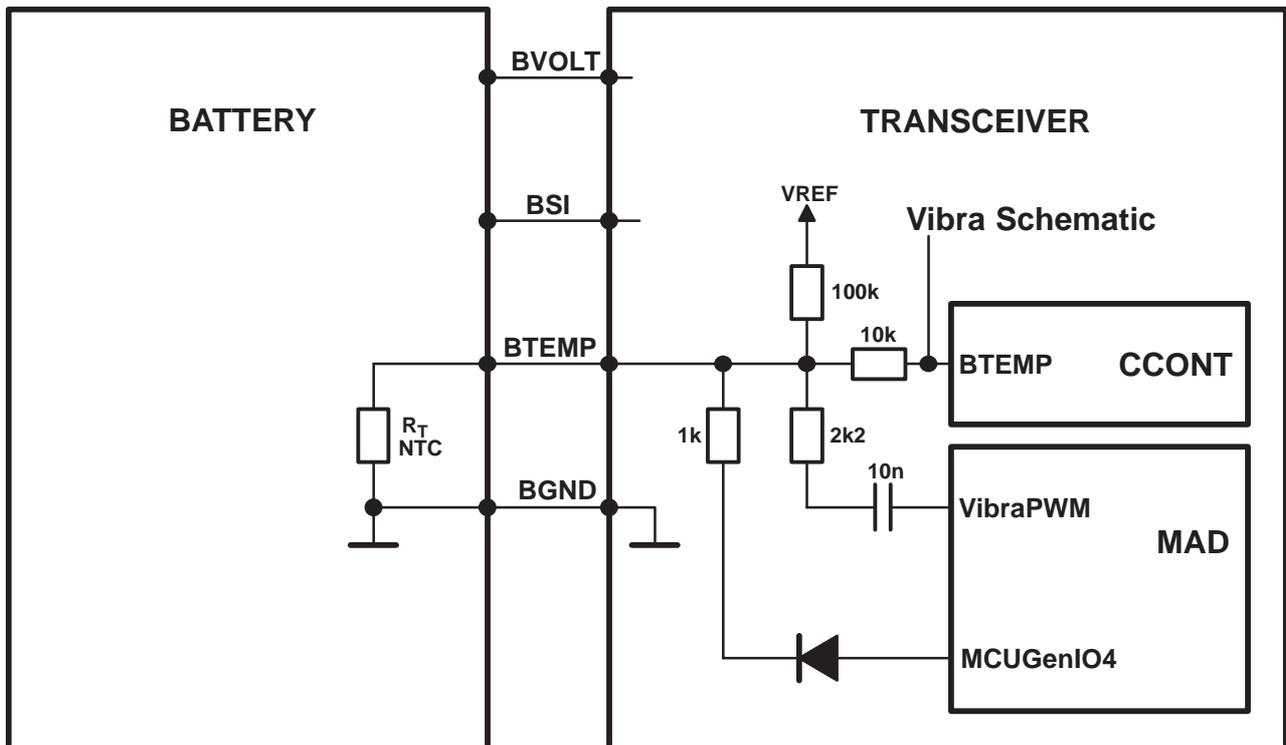


Figure 11. Battery Temperature

Supply Voltage Regulators

The heart of the power distribution is the CCONT. It includes all the voltage regulators and feeds the power to the whole system. The baseband digital parts are powered from the VBB regulator which provides 2.8V baseband supply. The baseband regulator is active always when the phone is powered on. The VBB baseband regulator feeds MAD and memories, COBBA digital parts and the LCD driver in the UI section. There is a separate regulator for a SIM card. The regulator is selectable between 3V and 5V and controlled by the SIMPwr line from MAD to CCONT. The COBBA analog parts are powered from a dedicated 2.8V supply VCOBBA. The CCONT supplies also 5V for RF and for flash VPP. The CCONT contains a real time clock function, which is powered from a RTC backup when the main battery is disconnected.

The RTC backup is rechargeable polyacene battery, which has a capacity of 50uAh (@3V/2V) The battery is charged from the main battery voltage by the CHAPS when the main battery voltage is over 3.2V. The charging current is 200uA (nominal).

Table 8.

Operating mode	Vref	RF REG	VCOB-BA	VBB	VSIM	SIMIF
Power off	Off	Off	Off	Off	Off	Pull down
Power on	On	On/Off	On	On	On	On/Off
Reset	On	Off VR1 On	On	On	Off	Pull down
Sleep	On	Off	On	On	On	On/Off

Note: CCONT includes also five additional 2.8V regulators providing power to the RF section. These regulators can be controlled either by the direct control signals from MAD or by the RF regulator control register in CCONT which MAD can update. Below are the listed the MAD control lines and the regulators they are controlling.

- TxPwr controls VTX regulator (VR5)
- RxPwr controls VRX regulator (VR2)
- SynthPwr controls VSYN_1 and VSYN_2 regulators (VR4 and VR3)
- VCXOPwr controls VXO regulator (VR1)

CCONT generates also a 1.5 V reference voltage VREF to COBBA, PLUSA and CRFU. The VREF voltage is also used as a reference to some of the CCONT A/D converters.

In addition to the above mentioned signals MAD includes also TXP control signal which goes to PLUSA power control block and to the power amplifier. The transmitter power control TXC is led from COBBA to PLUSA.

Audio Control

The audio control and processing is taken care by the COBBA-GJP, which contains the audio and RF codecs, and the MAD2, which contains the MCU, ASIC and DSP blocks handling and processing the audio signals.

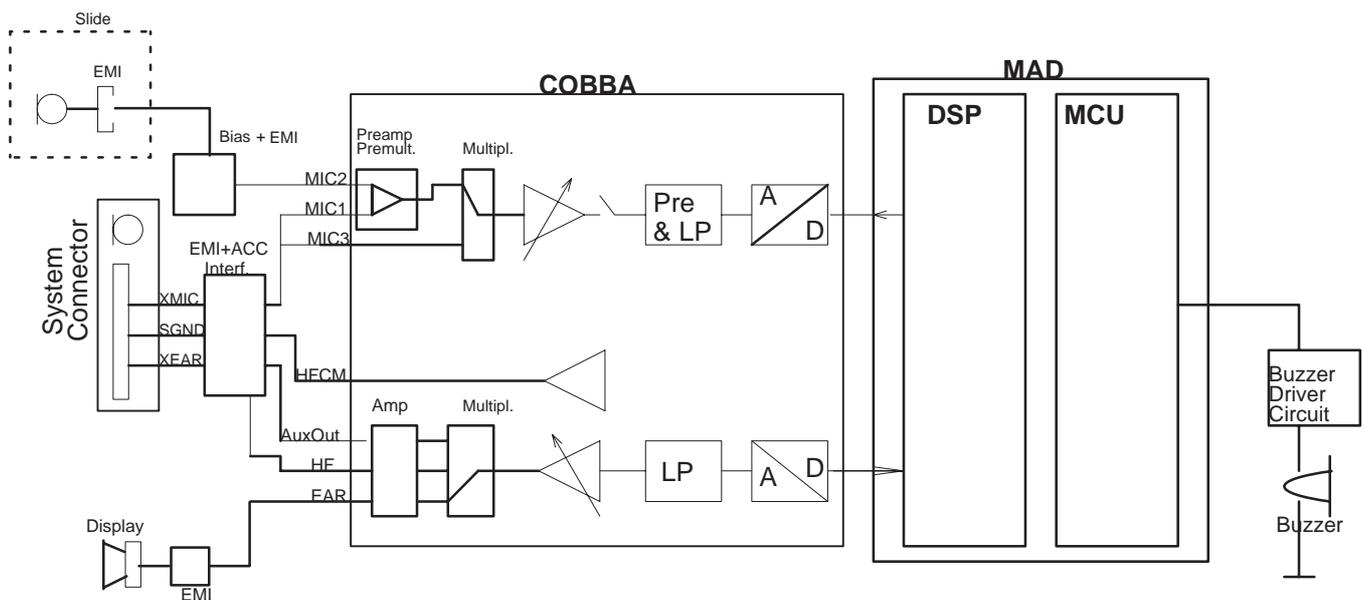


Figure 12. Audio Control

The baseband supports three microphone inputs and two earphone outputs. The inputs can be taken from an internal microphone, a headset microphone or from an external microphone signal source. The microphone signals from different sources are connected to separate inputs at the COBBA-GJP asic. Inputs for the microphone signals are differential type.

The MIC1 inputs are used for a headset microphone that can be connected directly to the system connector. The internal microphone is connected to MIC2 inputs and an external pre-amplified microphone (handset/handfree) signal is connected to the MIC3 inputs. In COBBA there are also three audio signal outputs of which dual ended EAR lines are used for internal earpiece and HF line for accessory audio output. The third audio output AUXOUT is used only for bias supply to the headset microphone. As a difference to DCT2 generation the SGND (= HFCM at COBBA) does not supply audio signal (only common mode). Therefore there are no electrical loopback echo from downlink to uplink.


The output for the internal earphone is a dual ended type output capable of driving a dynamic type speaker. The output for the external accessory and the headset is single ended with a dedicated signal ground SGND. Input and output signal source selection and gain control is performed inside the COBBA-GJP asic according to control messages from the MAD2. Keypad tones, DTMF, and other audio tones are generated and encoded by the MAD2 and transmitted to the COBBA-GJP for decoding.

Internal Microphone and Earpiece

The baseband supports three microphone inputs and two earphone outputs. The inputs can be taken from an internal microphone, a headset microphone or from an external microphone signal source. The microphone signals from different sources are connected to separate inputs to the COBBA_GJP asic. Inputs for the microphone signals are of a differential type.

External Audio Connections

The external audio connections are presented in figure 16. A headset can be connected directly to the system connector. The headset microphone bias is supplied from COBBA AUXOUT output and fed to microphone through XMIC line. The 330ohm resistor from SGND line to AGND provides a return path for the bias current.

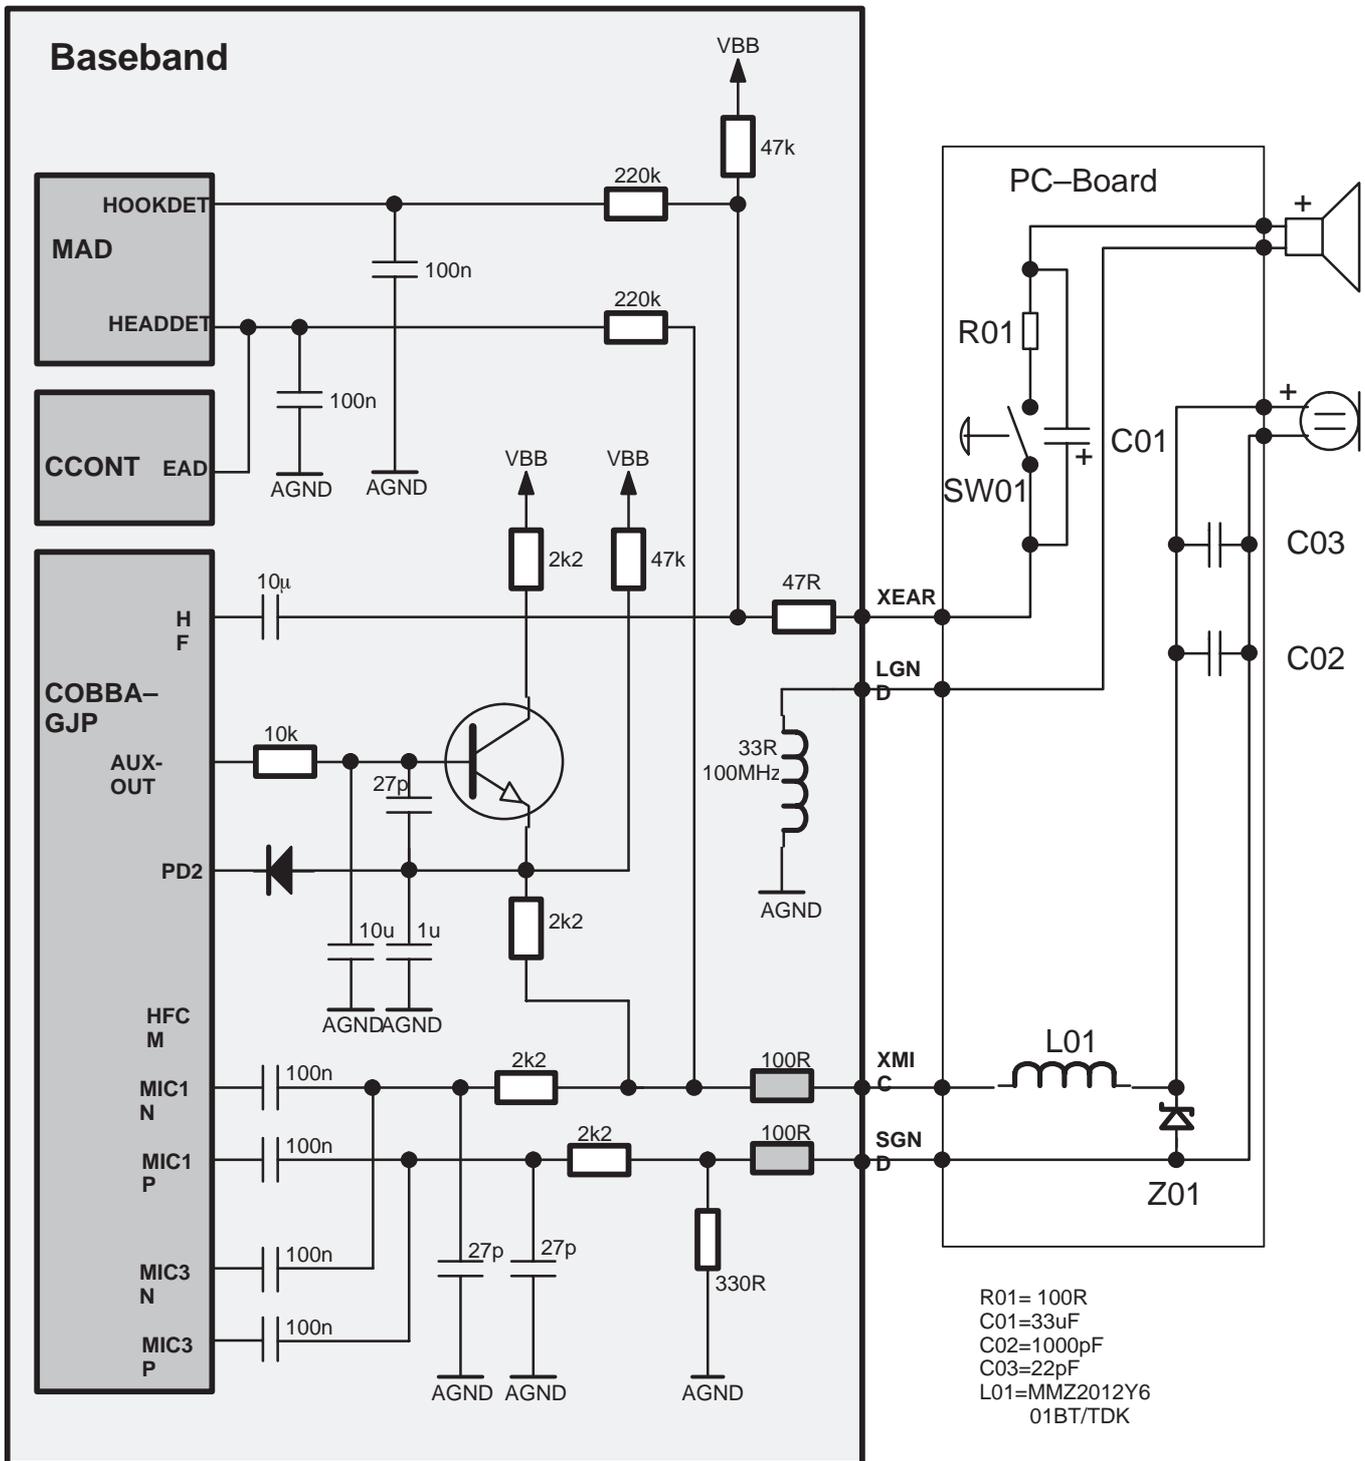

Note 1: Grey resistor are in the border of "EMI clean" and "dirty" areas.
 Note 2: AGND is connected directly to the GND on PCB close to HF parts.
 Note 3: ESD protection diodes are not shown.

Figure 13. Combined headset and system connector audio signal

Analog Audio Accessory Detection

In XEAR signal there is a 47 k Ω pullup in the transceiver and 6.8 k Ω pull-down to SGND in accessory. The XEAR is pulled down when an accessory is connected, and pulled up when disconnected. The XEAR is connected to the HookDet line (in MAD), an interrupt is given due to both connection and disconnection. There is filtering between XEAR and HookDet to prevent audio signal giving unwanted interrupts.

External accessory notices powered-up phone by detecting voltage in XMIC line. In Table 9 there is a truth table for detection signals.

Table 9.

Accessory connected	HookDet	HeadDet	Notes
No accessory connected	High	High	Pullups in the transceiver
Headset HDC-9 with a button switch pressed	Low	Low	XEAR and XMIC loaded (dc)
Headset HDC-9 with a button switch released	High	Low *)	XEAR unloaded (dc)
Handsfree (HFU-1)	Low	High	XEAR loaded (dc)


Internal Audio Connections

The speech coding functions are performed by the DSP in the MAD2 and the coded speech blocks are transferred to the COBBA-GJP for digital to analog conversion, down link direction. In the up link direction the PCM coded speech blocks are read from the COBBA-GJP by the DSP.

There are two separate interfaces between MAD2 and COBBA-GJP: a parallel bus and a serial bus. The parallel bus has 12 data bits, 4 address bits, read and write strobes and a data available strobe. The parallel interface is used to transfer all the COBBA-GJP control information (both the RFI part and the audio part) and the transmit and receive samples. The serial interface between MAD2 and COBBA-GJP includes transmit and receive data, clock and frame synchronisation signals. It is used to transfer the PCM samples. The frame synchronisation frequency is 8 kHz which indicates the rate of the PCM samples and the clock frequency is 1 MHz. COBBA is generating both clocks.

4-wire PCM Serial Interface

The interface consists of following signals: a PCM codec master clock (PCMDClk), a frame synchronization signal to DSP (PCMSClk), a codec transmit data line (PCMTX) and a codec receive data line (PCMRX). The COBBA-GJP generates the PCMDClk clock, which is supplied to DSP SIO. The COBBA-GJP also generates the PCMSClk signal to DSP by dividing the PCMDClk. The PCMDClk frequency is 1.000 MHz and is generated by dividing the RFIClk 13 MHz by 13. The COBBA-GJP further divides the PCMDClk by 125 to get a PCMSClk signal, 8.0 kHz.

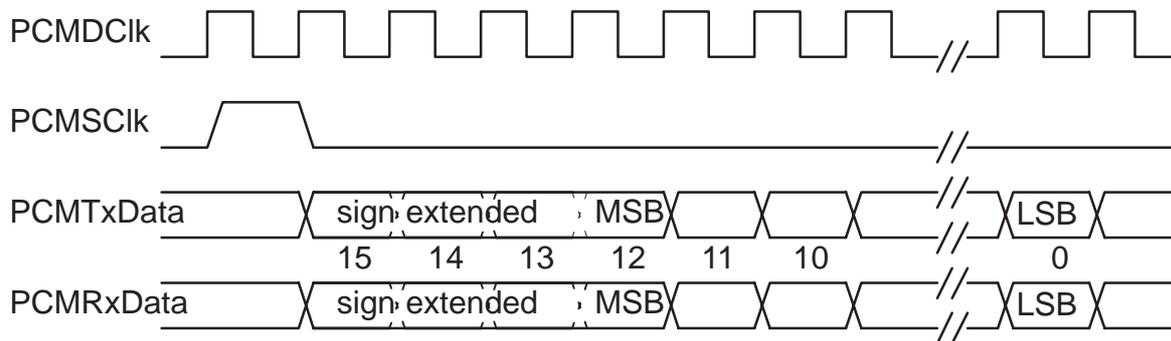

The output for the internal earphone is a dual ended type output capable of driving a dynamic type speaker. The output for the external accessory and the headset is single ended with a dedicated signal ground SGND. Input and output signal source selection and gain control is performed inside the COBBA_GJP asic according to control messages from the MAD2PR1. Keypad tones, DTMF, and other audio tones are generated and encoded by the MAD2PR1 and transmitted to the COBBA_GJP for decoding. MAD2PR1 generates two separate PWM outputs, one for a buzzer and one for vibra (internal and external via BTEMP).

Speech Processing

The speech coding functions are performed by the DSP in the MAD2PR1 and the coded speech blocks are transferred to the COBBA_GJP for digital to analog conversion, down link direction. In the up link direction the PCM coded speech blocks are read from the COBBA_GJP by the DSP.

There are two options for the PCM interface between MAD2PR1 and COBBA_GJP. The 4 pin solution and a one pin solution. The four pin serial interface between MAD2PR1 and COBBA_GJP includes transmit and receive data, clock and frame synchronisation signals. It is used to transfer the PCM samples. The frame synchronisation frequency is 8 kHz which indicates the rate of the PCM samples and the clock frequency is 1 MHz. COBBA_GJP generates both clocks. NSE-5 uses the 4-pin solution.

Alert Signal Generation

A buzzer is used for giving alerting tones and/or melodies as a signal of an incoming call. Also keypress and user function response beeps are generated with the buzzer. The buzzer is controlled with a BuzzerPWM output signal from the MAD2PR1. A dynamic type of buzzer is used since the supply voltage available can not produce the required sound pressure for a piezo type buzzer. The low impedance buzzer is connected to an output transistor that gets drive current from the PWM output. The alert volume can be adjusted either by changing the pulse width causing the level to change or by changing the frequency to utilize the resonance frequency range of the buzzer.

A vibra alerting device is used for giving a silent signal to the user of an incoming call. The device is controlled with a VibraPWM output signal from the MAD2PR1. The vibra alert can be adjusted either by changing the pulse width or by changing the pulse frequency. The vibra device is inside the phone, but a special vibra battery can also be used.

Digital Control

MAD2PR1

The baseband functions are controlled by the MAD2PR1 asic, which consists of a MCU, a system ASIC and a DSP. The GSM/PCN specific asic is named as MAD2. There are separate controller asics in TDMA and JDC named as MAD1 and MAD3. All the MAD2PR1 asics contain the same core processors and similar building blocks, but differ from each other in system specific functions, pinout and package types.

MAD2PR1 contains following building blocks:

- ARM RISC processor with both 16-bit instruction set (THUMB mode) and 32-bit instruction set (ARM mode)
- TMS320C542 DSP core with peripherals:
 - API (Arm Port Interface memory) for MCU–DSP communication, DSP code download, MCU interrupt handling vectors (in DSP RAM) and DSP booting
 - Serial port (connection to PCM)
 - Timer
 - DSP memory
- BUSC (BusController for controlling accesses from ARM to API, System Logic and MCU external memories, both 8- and 16-bit memories)
- System Logic
 - CTSI (Clock, Timing, Sleep and Interrupt control)
 - MCUIF (Interface to ARM via BusC). Contains MCU BootROM
 - DSPIF (Interface to DSP)
 - MFI (Interface to COBBA_GJP AD/DA Converters)
 - CODER (Block encoding/decoding and A51&A52 ciphering)
 - AccIF(Accessory Interface)
 - SCU (Synthesizer Control Unit for controlling 2 separate synthesizer)
 - UIF (Keyboard interface, serial control interface for COBBA_GJP PCM Codec, LCD Driver and CCONT)
 - UIF+ (roller/ slide handling)
 - SIMI (SimCard interface with enhanced features)
 - PUP (Parallel IO, USART and PWM control unit for vibra and buzzer)

- FLEXPOOL (DAS00308 FlexPool Specification)
- SERRFI (DAS00348 COBBA_GJP Specifications)

The MAD2PR1 operates from a 13 MHz system clock, which is generated from the 13MHz VCXO frequency. The MAD2PR1 supplies a 6,5MHz or a 13MHz internal clock for the MCU and system logic blocks and a 13MHz clock for the DSP, where it is multiplied to TBD MHz DSP clock. The system clock can be stopped for a system sleep mode by disabling the VCXO supply power from the CCONT regulator output. The CCONT provides a 32kHz sleep clock for internal use and to the MAD2PR1, which is used for the sleep mode timing. The sleep clock is active when there is a battery voltage available i.e. always when the battery is connected.

MAD2PR1 pinout

MAD2PR1 pins and their usage are described in the following table.

Table 10. MAD2PR1 pin list

Pad No	Pad Name	Direction	Drive + pull	Explanation	macro functions
1	MCUGenIO0	IO	2	BattIO	x205 ee-prom serial data sda
2fp	Col0	IO	2 down	keypad matrix	key
3	LEADGND0	PWR		digital gnd	gnd
4	Col1	IO	2	keypad matrix	key
5	Col2	IO	2	keypad matrix	key
6	Col3	IO	2	keypad matrix	key
7	Col4	IO	2	no connection	Vol up
8	LCDCSX	IO	2	serial LCD chip select	
9	GND0	PWR		digital gnd	gnd
10	Row5LCDCD	IO	2 up	Serial LCD command/data and row5	
11	Row4	IO	2 up	keypad matrix	
12	LEADVCC0	PWR		V_core	
13	Row3	IO	2 up	keypad matrix	
14	Row2	IO	2 up	keypad matrix	
15	Row1	IO	2 up	keypad matrix	
16fp	Row0	IO	2 up	keypad matrix (+powerkey)	
17fp	(JTDO)	IO	2 up	flex pool	JTDO default on
18	VCCSYS0	PWR		V_core	
19fp	(JTRst)	IO	2 down	flex pool	JTRst
20fp	(JTCIk)	IO	2 up	flex pool	JTCIk
21	VCCIO0	PWR		Vbb	

Table 10. MAD2PR1 pin list

Pad No	Pad Name	Direction	Drive + pull	Explanation	macro functions
22fp	(JTDI)	IO	2 up	flex pool	JTDi
23fp	(JTMS)	IO	2 up	flex pool	JTMS
24	LEADGND1	PWR		digital gnd	
25fp	(CoEmu0)	IO	2 up	flex pool	CoEmu0 DSP,MCU
26fp	(CoEmu1)	IO	2 up	flex pool	CoEmu1 DSP,MCU
27	GND1	PWR		digital gnd	
28	MCUAd0	O	2	lsb sram+flash adresse 0	mcu ad0
29	MCUAd1	O	2	sram+flash adresse 1	mcu ad1
30	MCUAd2	O	2	sram+flash adresse 2	mcu ad2
31	MCUAd3	O	2	sram+flash adresse 3	mcu ad3
32	ARMGND	PWR		digital gnd	gnd
33	MCUAd4	O	2	sram+flash adresse 4	mcu ad4
34	MCUAd5	O	2	sram+flash adresse 5	mcu ad5
35	MCUAd6	O	2	sram+flash adresse 6	mcu ad6
36	MCUAd7	O	2	sram+flash adresse 7	mcu ad7
37	MCUAd8	O	2	sram+flash adresse 8	mcu ad8
38	MCUAd9	O	2	sram+flash adresse 9	mcu ad9
39	MCUAd10	O	2	sram+flash adresse 10	mcu ad10
40	MCUAd11	O	2	sram+flash adresse 11	mcu ad11
41	ARMVCC	PWR		V_core	
42	MCUAd12	O	2	sram+flash adresse 12	mcu ad12
43	MCUAd13	O	2	sram+flash adresse 13	mcu ad13
44	VCCSYS1	PWR		V_core	
45	MCUAd14	O	2	sram+flash adresse 14	mcu ad14
46	GND2	PWR		digital gnd	
47	MCUAd15	O	2	sram+flash adresse 15	mcu ad15
48	MCUAd16	O	2	msb sram+flash adresse 16	mcu ad16
49	MCUAd17	O	2	flash adresse 17	mcu ad17
50	MCUAd18	O	2	flash adresse 18	mcu ad18
51	MCUAd19	O	2	flash adresse 19	mcu ad19
52fp	MCUAd20	IO	2 down	reserved for 32Mbit flash 20 / roller ?	mcu ad20
53fp	(MCUAd21)	IO	2 down	roller	nWait
54	MCURdX	O	2	read strobe	
55	MCUWrX	O	2	write strobe	

Table 10. MAD2PR1 pin list

Pad No	Pad Name	Direction	Drive + pull	Explanation	macro functions
56	VCCIO1	PWR		Vbb	
57	ExtMCUDa0	IO	2 down	lsb sram+flash data 0	
58	ExtMCUDa1	IO	2 down	sram+flash data 1	
59	ExtMCUDa2	IO	2 down	sram+flash data 2	
60	ExtMCUDa3	IO	2 down	sram+flash data 3	
61	ExtMCUDa4	IO	2 down	sram+flash data 4	
62	ExtMCUDa5	IO	2 down	sram+flash data 5	
63	ExtMCUDa6	IO	2 down	sram+flash data 6	
64	GND3	PWR		digital gnd	
65	ExtMCUDa7	IO	2 down	msb sram+flash data 7	
66	VCCSYS2	PWR		V_core	
67	MCUGenIODa0	IO	2 down	flash data 8	
68	MCUGenIODa1	IO	2 down	flash data 9	
69	MCUGenIODa2	IO	2 down	flash data 10	
70	MCUGenIODa3	IO	2 down	flash data 11	
71	MCUGenIODa4	IO	2 down	flash data 12	
72	MCUGenIODa5	IO	2 down	flash data 13	
73	MCUGenIODa6	IO	2 down	flash data 14	
74	MCUGenIODa7	IO	2 down	msb flash data 15	
75	SCVCC	PWR		Vbb	
76	RFCIk	clock slicer		13MHz VCTXO	
77	RFCIkGND	clock slicer		system clock ref gnd input	
78	SIMCardDetX	input threshold cell		to BSI terminal	
79	SCGND	PWR		speciel cell gnd	
80	ROM1SelX	O	2	chip sel for flash	
81	RAMSelX	O	2	chip sel for sram	
82fp	(ROM2SelX)	IO	2 up	nc	trust mcu clk
83	GND4	PWR		digital gnd	
84fp	EEPROMSelX	IO	2 up	roller	trace pod
85	LEADVCC1	PWR		V_core	
86	MCUGenIO1	IO	2 up	roller input	battio
87fp	BuzzPWM	IO	2 down	buzzer contol signal	nOPC
88fp	DSPXF	IO	2 up	ext flag no connection	hOPC(trace)

Table 10. MAD2PR1 pin list

Pad No	Pad Name	Direction	Drive + pull	Explanation	macro functions
89f	VibraPWM	IO	2 down	vibra motor control signal	nEXEC
90	VCCIO2	PWR		Vbb	
91	AccRxData	I		FBUS Rx / flash Rx	
92	AccTxData	IO	4	FBUS Tx / flash Tx	
93	MBUS	IO	2	MBUS / flash clk	
94	VCCSYS3	PWR		V_core	
95	VCXOPwr	O	2	CCONT VR1 Regulator	
96	LEADGND2	PWR		digital gndbb	
97fp	GenDet interrupt	IO	2	slide input	nc
98fp	HookDet interrupt	IO	8		headdet
99fp	HeadDet interrupt	IO	2		hookdet
100	GND5	PWR		digital gnd	
101	MCUGenIO2	IO	2 up	IrDA select	eprom scl
102	MCUGenIO3	IO	2 up	LCD reset	ironx/bc0
103	MCUGenIO4	IO	2 up	WP to flash	irnxen/bc1
104f	(SynthPwr) not used	IO	2 down	CCONT reg	
105	GenCCONTCSX	O	2	to CCONT bus enable	
106	LEADVCC2	PWR		V_core	
107	GenSDIO	IO	2	serial bidirectional databus to/from CCONT	
108	GenSClk	O	2	clk for serial databus	
109	SIMCardData	IO	2	CCONT SIM level shift	
110	PURX	I		power on reset from CCONT	
111	CCONTInt charger detect	I		interrupt from CCONT	
112	VCCIO3	PWR		Vbb	
113	Clk32k	I		sleep clk from CCONT	
114	SIMCardClk	O	2	CCONT SIM level shift	
115	SIMCardRstX	O	2	CCONT SIM level shift	
116	SIMCardIOC	O	2	CCONT SIM data direction control	
117	GND6	PWR		digital gnd	
118f	(SIMCardPwr) not used	IO	2 up	CCONT reg	
119f	(RxPwr) not used	IO	2 down	not used	
120f	(TxPwr) not used	IO	2 down	not used	

Table 10. MAD2PR1 pin list

Pad No	Pad Name	Direction	Drive + pull	Explanation	macro functions
121	TestMode	I	down		Testmode select
122	ExtSysResetX	O	2	nc routed to via	
123f	(PCMIO) not used	IO	2 up	single pin audio pcm option	
124f	PCMTxData	IO	2 up	audio data to COBBA_GJP	
125f	PCMRxData	IO	2 up	audio data from COBBA_GJP	
126f	PCMDCIk	IO	2 up	pcm data transfer clk	
127f	PCMSCIk	IO	2 down	8 kHz frame sync	
128	VCCSYS4	PWR		v_core	
129	COBBACIk	O	4	rfi system clk to COBBA_GJP	
130	Idata	IO	2	COBBA_GJP I	
131	Qdata	IO	2	COBBA_GJP Q	
132	COBBACSX	O	2	COBBA_GJP serial chip select	
133	COBBASD	IO	2	COBBA_GJP serial data	
134	DSPGenOut0	O	2	COBBA_GJP reset	
135	DSPGenOut1	O	2	chaps Vlim	
136	VCCIO4	PWR		Vbb	
137	DSPGenOut2	IO	2		seq
138	DSPGenOut3	IO	2		mas0
139f	FrACtrl (pdata 0)	IO	2 down	RF LNA AGC /CRFU	
140	SynthEna	O	2	RF /PLUSA	
141	SynthClk	O	2	RF /PLUSA	
142	GND7	PWR		digital gnd	
143	SynthData	O	2	RF /PLUSA	
144f	TxPA	IO	2 down	PA + PLUSA	

fp=f=pin in the flex pool

Table 11. COBBA_GJP pin list

	Name	Type	Description
1	MIC1P	I	Positive high impedance input for microphone.
2	V _{SA5}	P	Negative analog power supply for PCM ADC
3	V _{SUBA}	P	Audio Codec substrate contact
4	MIC3N	I	Third negative high impedance input for microphone.
5	MIC3P	I	Third positive high impedance input for microphone.
6	V _{DA5}	P	Positive analog power supply for PCM ADC
7	AUXOUT	O	Auxiliary audio output
8	V _{DA4}	P	Positive analog power supply for PCM DAC
9	EARP	O	Positive earpiece output.
10	EARN	O	Negative earpiece output.
11	V _{SA4}	P	Negative analog power supply for PCM DAC
12	HF	O	Output for phone external audio circuitry.
13	HFCM	O	Common mode output for phone external audio circuitry.
14	V _{DA2}	P	Positive analogue power supply for the transmitters.
15	VREF	I	Reference voltage input (1.5 V)
16	IREF	O	Reference current output. Absolutely no capacitance allowed on this pin.
17	AFCOut	O	Automatic frequency control output.
18	V _{SA2}	P	Negative analogue power supply for the transmitters.
19	TxIOutN	O	Negative in-phase transmit output.
20	TxIOutP	O	Positive in-phase transmit output.
21	TxQOutN	O	Negative quadrature transmit output.
22	TxQOutP	O	Positive quadrature transmit output.
23	V _{DA3}	P	Positive analogue power supply.
24	TxIPhsN	O	Negative in-phase PHS transmit output.
25	TxIPhsP	O	Positive in-phase PHS transmit output.
26	TxQPhsN	O	Negative quadrature PHS transmit output.
27	TxQPhsP	O	Positive quadrature PHS transmit output.
28	TxCOut	O	Transmit power control output.
29	AGCOut	O	Second output of TxC DAC
30	AuxDAC	O	Third output of TxC DAC

Table 11. COBBA_GJP pin list (continued)

	Name	Type	Description
31	V _{SA3}	P	Negative analogue power supply.
32	RxRef	O	Rx path internal reference buffered output.
33	V _{DA1}	P	Positive analogue power supply for the receivers.
34	RxInN	I	Negative receive input.
35	RxInP	I	Positive receive input.
36	V _{SA1}	P	Negative analogue power supply for the receivers.
37	ResetX	I	Master system reset.
38	PData(0)	O	PData(0). Lim control for chaps
39	Pdata(1)	O	PData(1). light control
40	Pdata(2)	O	PData(2).
41	Pdata(3)	O	PData(3).
42	Pdata(4)	O	Pdata(4)
43	Pdata(5)	O	PData(5).
44	Pdata(6)	O	PData(6)
45	V _{SS2}	P	Negative digital power supply.
46	V _{DD2}	P	Positive digital power supply.
47	RFIClk	I	System clock input.
48	RFIDAX	O	Data available strobe for JDC+PHS/ Pdata(7) in GSM,GSMV
49	V _{SUB}	P	Negative power supply for substrate
50	COBBACSX	I	Serial port chip select
51	COBBASD	I/O	Serial data for the general interface
52	COBBAIdata	I/O	Bi-directional transfer of I-samples
53	COBBAQdata	I/O	Bi-directional transfer of Q-samples
54	TEST	I	Test pin
55	V _{SS1}	P	Negative digital power supply.
56	PCMSCLK	O	8 kHz Frame Sync (4-wire) / PData(8) (1-wire)
57	PCMDCLK	O	PCM bus data transfer clock (4-wire) / PData(9) (1-wire)
58	PCMTxData	I/O	PCM bus transmit data (4-wire) / IO -data (1-wire)
59	PCMRxData	I	PCM bus receive data (4-wire) / PData(10) (1-wire)
60	V _{DD1}	P	Positive digital power supply.
61	MBIAS	O	Bias output for microphone 2.35 V.

Table 11. COBBA_GJP pin list (continued)

	Name	Type	Description
62	MIC2N	I	Second negative high impedance input for microphone.
63	MIC2P	I	Second positive high impedance input for microphone.
64	MIC1N	I	Negative high impedance input for microphone.

Table 12. CCONT 3V Pin assignment

Pin	Symbol	Type	State In Reset	Description
1	RSSI	I		Receive Signal Strength Indicator
2	ICHAR	I		V(ICHAR) Voltage input
3	MODE_SEL	I	High Z / GND	Mode select High Z=normal mode GND=RAM_Bck
4	VR3/RAM_bck	O	0V/2.8V	VR3 regulator output/RAM backup
5	CNTVR3	I	High Z	Control VR3 regulator
6	CNTVR2	I	High Z	Control VR2 regulator
7	CNTVR5	I	High Z	Control VR5 regulator
8	VBAT	P		Unregulated supply voltage (RF)
9	VR2	O	High Z	VR2 regulator output
10	GROUND	P		(RF)
11	VR5	O	High Z	VR5 regulator output
12	VBAT	P		Unregulated supply voltage (RF)
13	VREF	O	1.244/1.5V	Reference voltage output
14	GROUND	P		(RF)
15	VR4	O	High Z	VR4 regulator output
16	VBAT	P		Unregulated supply voltage (RF)
17	CNTVR4	I	High Z	Control VR4 regulator
18	TXPWR	I	High Z	Control VR7 regulator (CNTVR7)
19	VR7BASE	O	High Z	VR7 regulator base current
20	VR7	O	High Z	VR7 regulator output

Table 12. CCONT 3V Pin assignment (continued)

Pin	Symbol	Type	State In Reset	Description
21	VBAT	P		Unregulated supply voltage (RF)
22	VR6	O	2.8V	VR6 regulator output (COB-BA_GJP)
23	GROUND	P		(RF)
24	SLEEPX	I	"1"	Control VR1 regulator (CNTVR1)
25	VR1	O	2.8V	VR1 regulator output (VCXO)
26	VR1_sw	O	High Z	VR1 switched output
27	VBAT	P		Unregulated supply voltage (RF)
28	VBAT2	P		Unregulated supply voltage (VSIM, V5V, SMR, SIMIf)
29	PWRONX/ WDDISX	I	VBAT/GND	Power on control from keyboard Watchdog disable
30	SIM_PWR	I	"1"/"0"	SIM regulator enable
31	GROUND	P		(VSIM, V5V, SMR, SIMIf)
32	V5V	O	High Z	5V dc voltage output
33	V5V_2	O	High Z	Reserved for 5V SMR
34	V5V_4	O	High Z	Reserved for 5V SMR
35	V5V_3	O	High Z	Reserved for 5V SMR
36	VSIM	O	3.0V/High Z	SIM regulator output
37	GROUND	P		(VSIM, V5V, SMR, SIMIf)
38	SIMCLK_O	O	"0"	Clock output from SIM interface (5MHz)
39	SIM I/O_C	I	High Z	SIM data I/O control
40	SIMRST_A	I	High Z	SIM interface reset (from MAD2PR1)
41	SIMCLK	I	High Z	Clock to SIM interface (5MHz)
42	SIMRST_O	O	"0"	Reset output from SIM-interface (to SIM)
43	DATA_O	I/O	"0"	SIM data I/O line
44	DATA_A	I/O	"0"	SIM-Interface MAD2PR1 Data
45	VBACK	P	Backup Battery	Backup Battery Input
46	CRA	I		Crystal for 32kHz sleep clock
47	CRB	I		Crystal for 32kHz sleep clock

Table 12. CCONT 3V Pin assignment (continued)

Pin	Symbol	Type	State In Reset	Description
48	SLCLK	O		Sleep clock output
49	DATACLK	I	High Z	MAD2PR1 bus clock
50	DATASELX	I	High Z	MAD2PR1 bus enable
51	DATA_IN/OUT	I/O	High Z	MAD2PR1 Bus serial data
52	CCONTINT	O	"0"	CCONT interrupt output
53	TEST	I	GND	Test Pin (Ground =>normal operation)
54	PURX	O	"0"	Power up reset signal
55	VBB	O	2.8V	Baseband regulator output
56	PWMOUT	O	"0"	PWM out (3/0 V)
57	VBAT1	P		Unregulated supply voltage (VBB, V2V, ADC, 32kHz)
58	GROUND	P		(VBB, V2V, ADC, 32kHz)
59	V2V	O	1.975V	MAD2PR1 core regulator output
60	VCHAR	I		Charger Voltage
61	VCXOTEMP	I		VCXO-temperature
62	BSI	I		Battery type input
63	BTEMP	I		Battery temperature input
64	EAD	I		External Accessory Detection

Memories

The MCU program code resides in an external program memory, size is 16Mbits. MCU work (data) memory size is 1Mbits. A special block in the flash is used for storing the system and tuning parameters, user settings and selections, a scratch pad and a short code memory.

A target is to eliminate the separate EEPROM memories and store the non-volatile data into a dedicated block inside the flash memory in products where the flash memory will not be replaced by an otp or a mask prom for either technical or marketing reasons. Flash solution gives a cost benefit in products where large EEPROM sizes are required. The used flash memories are capable to perform erase and write operations with the supplied 2.8V programming voltage.

The BusController (BUSC) section in the MAD2PR1 decodes the chip select signals for the external memory devices and the system logic. BUSC controls internal and external bus drivers and multiplexers connected to the MCU data bus. The MCU address space is divided into access areas with separate chip select signals. BUSC supports a programmable number of wait states for each memory range.

Program Memory 32MBit Flash

The MCU program code resides in the flash program memory. The program memory size is 32Mbits (2Mx16) . The default package is uBGA48.

The flash memory has a power down pin that shall be kept low, during the power up phase of the flash to ensure that the device is powered up in the correct state, read only. The power down pin is utilized in the system sleep mode by connecting the VCXOPwr to the flash power down pin to minimize the flash power consumption during the sleep.

SRAM Memory

The work memory size is 2Mbits (256kx8) static ram in a shrunked TSOP-32 package. Vcc is 2.8V and access time is 85 ns. The work memory is supplied from the common baseband VBB voltage and the memory contents are lost when the baseband voltage is switched off. All retainable data should be stored into the flash memory when the phone is powered down.

EEPROM Emulated in FLASH Memory

An block in flash is used for a nonvolatile data memory to store the tuning parameters and phone setup information. The short code memory for storing user defined information is also implemented in the flash. The flash size can vary between 2k to 8kbytes depending on the amount of short code number locations supported. The memory is accessed through the parallel bus.

MCU Memory Requirements

The MCU memory requirements are shown below.

Table 13. HD945 Memory Requirements

Product	Device	Organization	Access Times	Wait States Used	Remarks
DCT3.5	ROM	2Mx16	100	1	2.8V/2.8V Read/Write
DCT3.5	SRAM	256Kx8	85	1	120ns @ 2.8V Read/Write

Flash Programming

The system connector can be used as a flash prom programming interface for flash memories for updating (i.e. re-programming) the flash program memory. Used system connector pins and their functions are listed in Table 3.

To flash the phone use service battery (BBD-3) this will automatically power up the phone via BTEMP. When flashing, the phone has to be initialised after each file has been flashed. The flash prommer controls the power up of the phone via the service battery.

The program execution starts from the BOOT ROM and the MCU investigates in the early start-up sequence if the flash prommer is connected. This is done by checking the status of the MBUS-line. Normally this line is high but when the flash prommer is connected the line is forced low by the prommer. The flash prommer serial data receive line is in receive mode waiting for an acknowledgement from the phone.

The data transmit line from the baseband to the prommer is initially high. When the baseband has recognized the flash prommer, the FBUS TX-line is pulled low. This acknowledgement is used to start the data transfer of the first two bytes from the flash prommer to the baseband on the FBUS RX-line. The data transmission begins by starting the serial transmission clock (MBUS-line) at the prommer.

The 2.8V programming voltage is supplied inside the transceiver from the CCONT.

For protecting the MAD2PR1 against ESD spikes at the system connector, the data transmission lines (MBUS, RX and TX) are equipped with EMI fitters.

Table 14. Flash Programming, DC connector

Pin	Name	Parameter	Min	Typ	Max	Unit	Remark
1	VIN	Supply Voltage	6.8	7.8	8.8	V	Supply Voltage
2	GND	GND	0		0	V	Supply ground
11	MBUS	Serial clock from the Prommer	2.0 0		2.8 0.8	V	Prommer detection and Serial Clock for synchronous communication
12	FBUS_RX	Serial data from the Prommer	2.0v 0v		2.8 0.8	V	Receive Data from Prommer to Baseband
13	FBUS_TX	Data acknowledge to the Prommer	2.0 0,1		2.8 0.8	V	Transmit Data from Baseband to Prommer
14	GND	GND	0		0	V	Supply ground

IBI Accessories

All accessories which can be connected between the transceiver and the battery or which itself contain the battery, are called IBI accessories.

Either the phone or the IBI accessory can turn the other on, but both possibilities are not allowed in the same accessory.

Phone Power-on by IBI

IBI accessory can power the phone on by pulling the BTEMP line up to 3 V.

IBI power-on by phone

Phone can power the IBI accessory on by pulling the BTEMP line up by MCUGenIO4 of MAD2. BTEMP measurement is not possible during this time.

The accessory is commanded back to power-off by MBUS message.

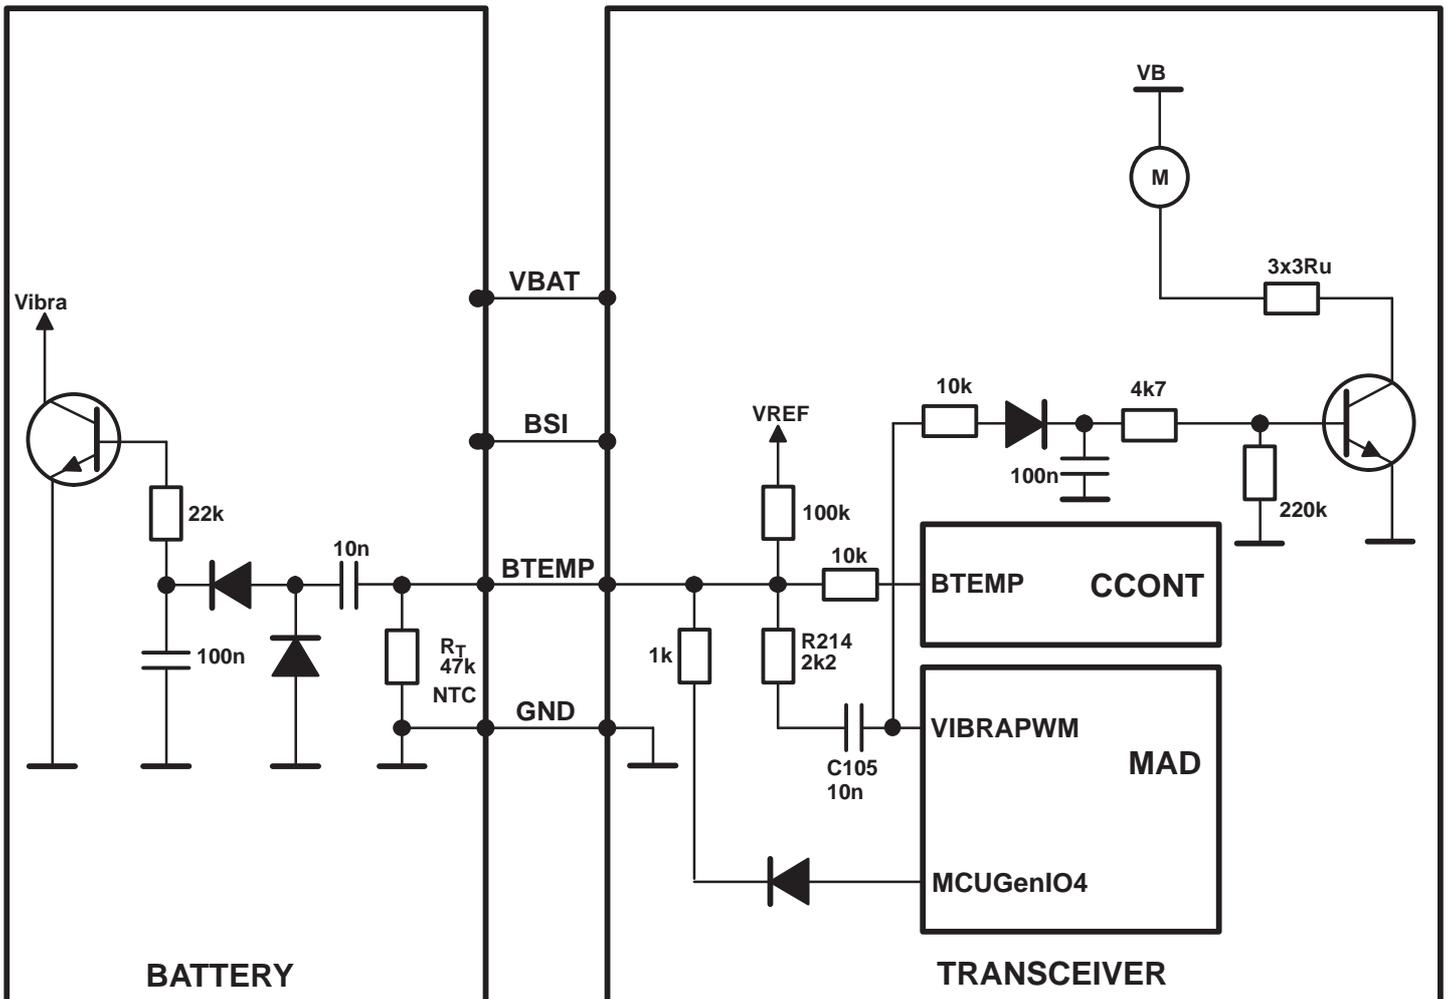


Figure 14. IBI Power on

MCU Memory Map

MAD2PR1 supports maximum of 4GB internal and 4MB external address space. External memories use address lines MCUAd0 to MCUAd21 and 8-bit/16-bit databus. The BUSC bus controller supports 8- and 16-bit access for byte, double byte, word and double word data. Access wait states (0, 1 or 2) and used databus width can be selected separately for each memory block.

Table 15. MCU Memory map

Memory block	Chip select	Start address	Stop address	Size	Size
boot ROM (*)	internal	0000 0000	0000 FFFF	64k	64k
API RAM	internal	0001 0000	0001 FFFF	64k	64k
System logic	internal	0002 0000	0002 FFFF	64k	64k
API ctl reg.	internal	0003 0000	0003 FFFF	64k	64k
Bus Controller	Internal	0004 0000	0007 FFFF	256k	256k
The same as 0-7FFFF		0008 0000	000F FFFF	512 k	512 k
ext. RAM (*)	RAMSelX	0010 0000	001F FFFF	1M	1M
ext. ROM1	ROM1SelX	0020 0000	005F FFFF	4M	4M
(ext. ROM2sel is in flexpool in MAD2PR1) 144pin (*)	(ROM2SelX)	(0060 0000)	(009F FFFF)	(4M)	(4M)
(ext. EE-PROM is in flex pool in MAD2PR1)	(EEPROMSelX)	(00A0 0000)	(00DF FFFF)	(4M)	(4M)
reserved		00E0 0000	00FF FFFF	4M	4M
The same as 0-FF FFFF		0100 0000	FFFF FFFF	4G – 16 M	4G – 16 M

(*) After reset and when BootROMDis and ROM2Boot are low.

MCU can boot from different memory locations, depending on hardware (GenSDIO0) and software settings.

Table 16. MCU boot memory selection

Start address	Stop address	BootROMDis=0 ROM2Boot=0	BootROMDis=1 ROM2Boot=0	BootROMDis=0 ROM2Boot=1	BootROMDis=1 ROM2Boot=1
0000 0000	0000 FFFF	boot ROM	External RAM	ext. ROM2	External RAM

RF Module

The RF module converts the signal received by the antenna to a baseband signal and vice versa.

It consists of a conventional superheterodyne receiver and a transmitter for each band and also two frequency synthesizers for the required mixing.

The architecture contains two integrated circuits, a CRFU3_D1 and a SUMMA. They are both BiCMOS ASICs, which is a suitable technology for integration of RF functions.

The CFRU3 includes:

- A LNA for each band with a step AGC
- Down converters for the receiver
- Image rejection upconversion mixers for the transmitter
- A prescaler for the 2 UHF VCO


The SUMMA includes:

- An AGC amplifier for the receiver
- A receiver mixer for the 13 MHz down conversion
- PLLs for the UHF and VHF synthesizers
- IQ-modulators for the transmitter
- A power control circuit for the transmitter

The power amplifiers (PAs) are MMIC technology (Monolithic Microwave Integrated Circuit). They include three amplifier stages with input, interstage and output matching.

On the next page is a graphical presentation of the used Frequency Plan.

RF Frequency Plan

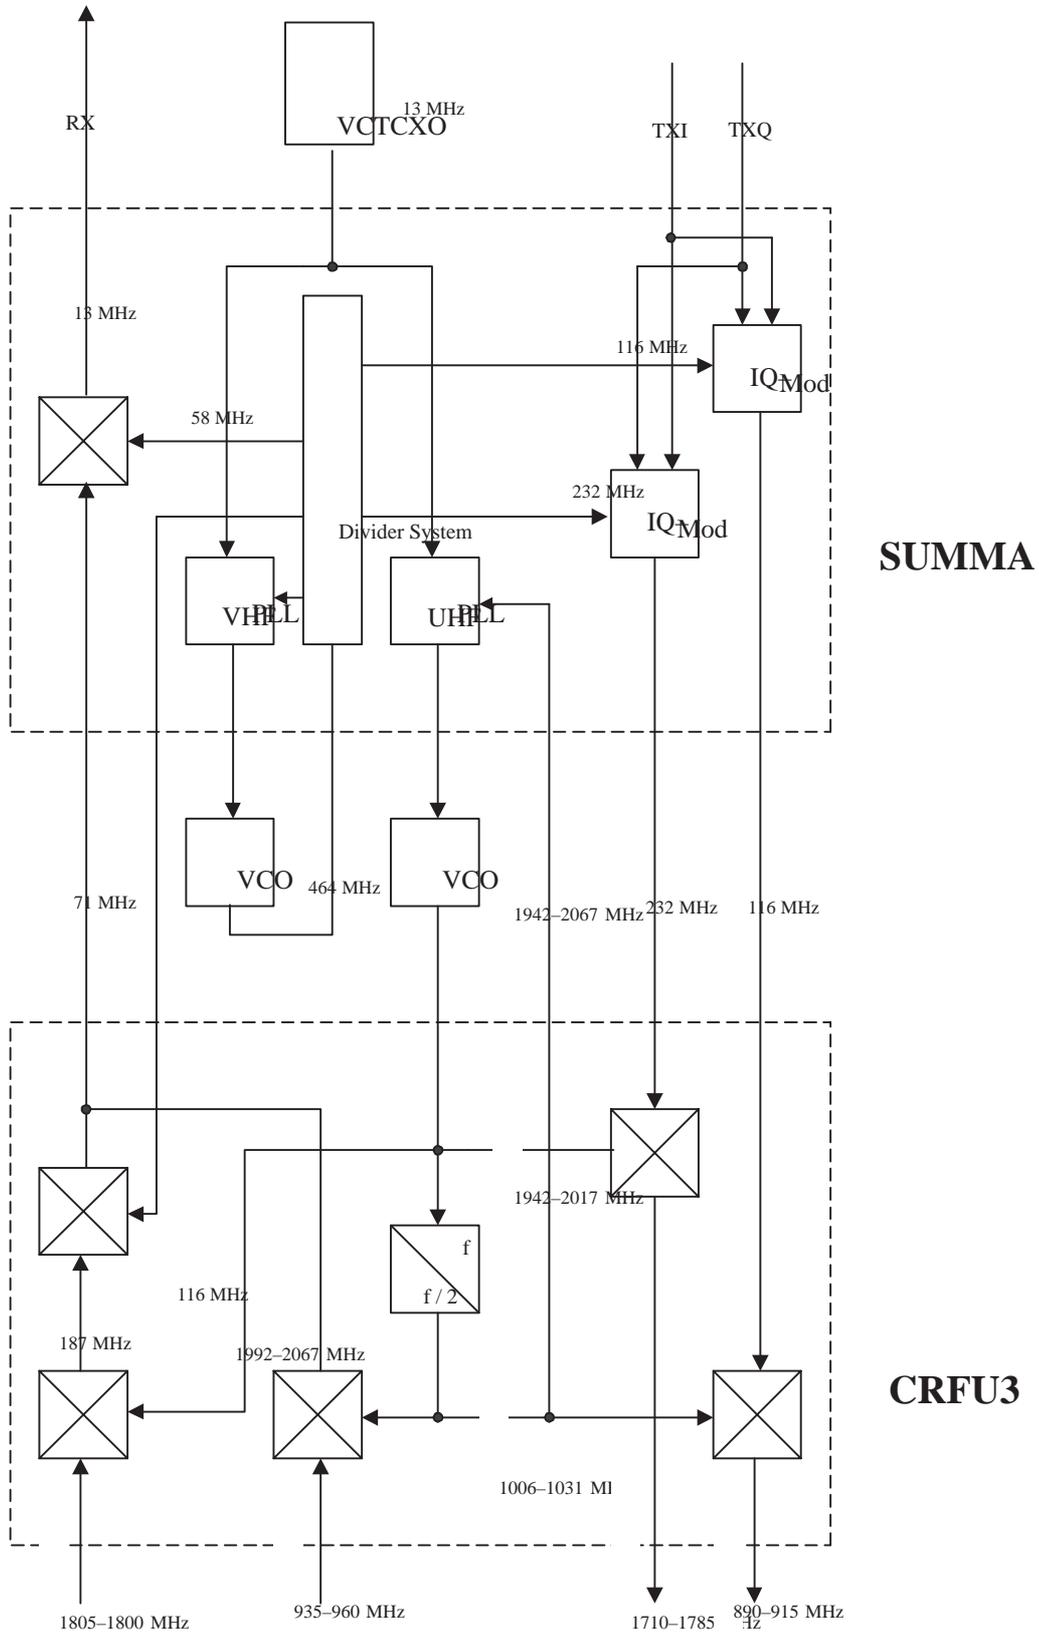

DC Regulators

The transceiver has a multi function power management IC, which contains among other functions 7 pcs of 2.8 V regulators. All regulators can be controlled individually with 2.8 V logic directly or through a control register. However, in the chosen configuration of the CCONT, direct control is only used with VR1. The control register is used to switch off the regulators when they are not in use.

The CCONT also provides a 1.5 V reference voltage for the SUMMA. This reference voltage is used for the DACs and ADCs in the COBBA too.

The use of the regulators can be seen in the Power Distribution Diagram.

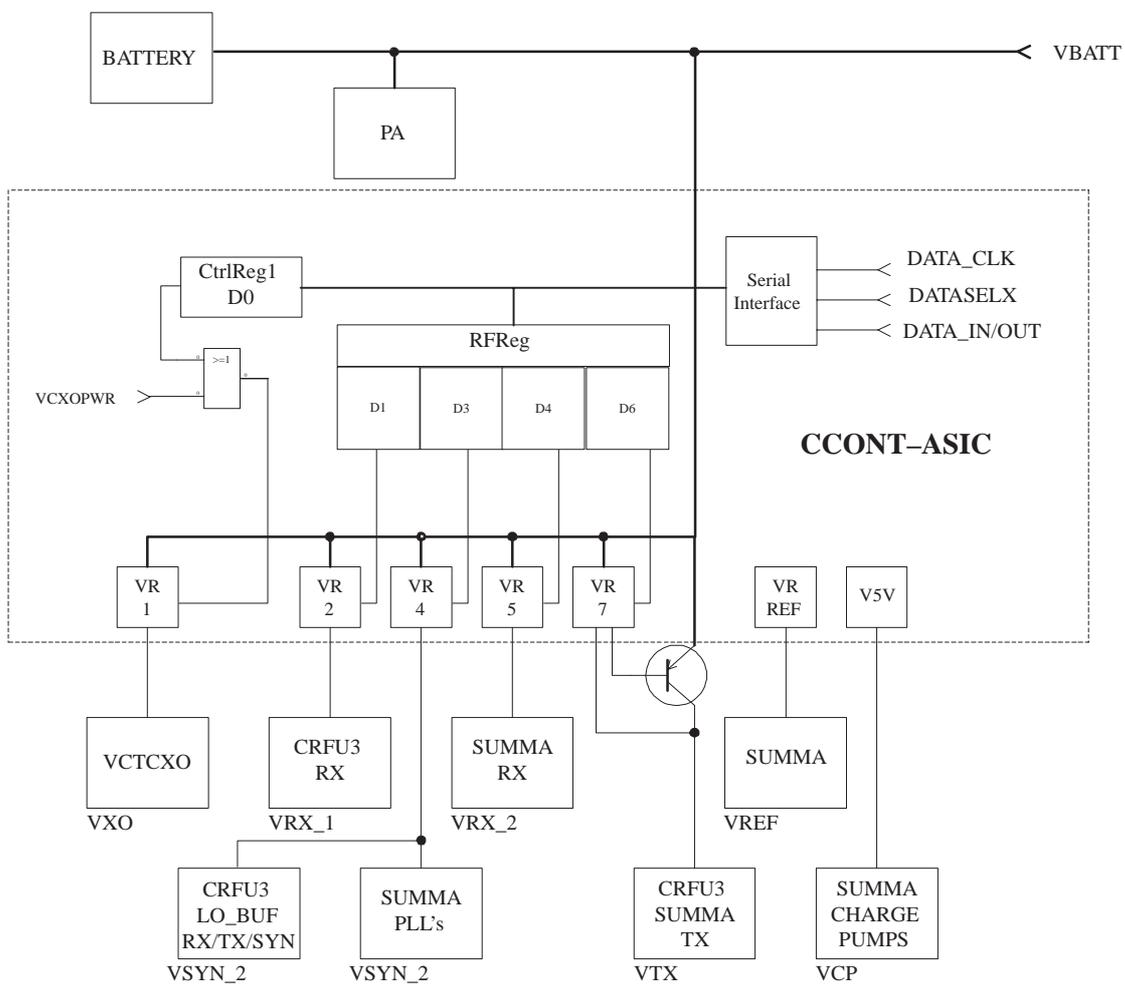


Figure 15. Power Distribution

Frequency Synthesizers

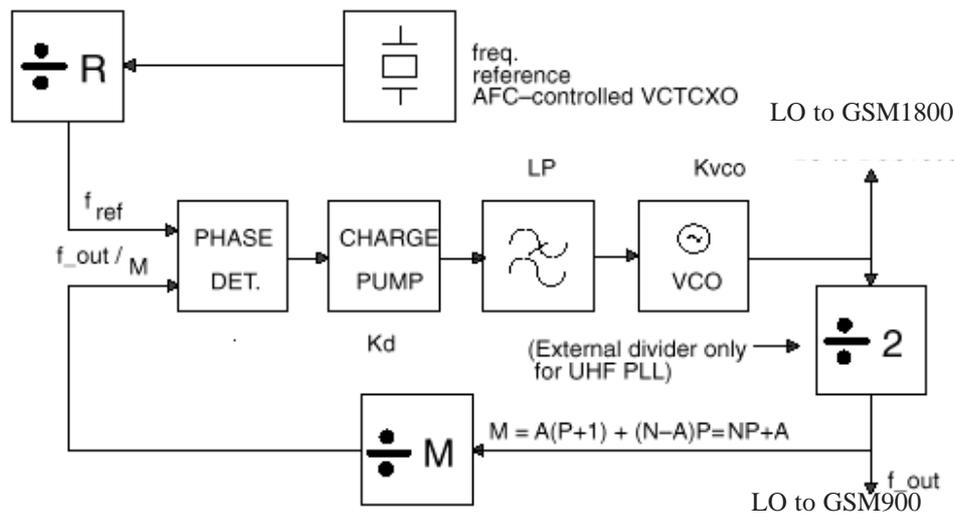


Figure 16. Frequency Synthesizers siser

Both the UHF- and the VHF-VCO are locked with PLLs to a stable frequency source, which is a VCTCXO-module (Voltage Controlled Temperature Compensated Crystal Oscillator). The VCTCXO is running at 13 MHz and is locked to the frequency of the base station by means of an AFC (Automatic Frequency Control).

The UHF PLL is common for both systems and is located in the SUMMA except for an external UHF-VCO. The part in the SUMMA includes a 64/65 (P/P+1) prescaler, a N- and A-divider, a reference divider, a phase detector and a charge pump for the external loop filter. The UHF-VCO is running at 2 GHz. The UHF local oscillator signal is generated by first dividing the UHF-VCO signal by two in the CRFU3 prescaler. After that the signal is fed to the SUMMA prescaler. The latter prescaler is a dual modulus divider. The output of the prescaler is fed to N- and A-divider, which produce the input to the phase detector. The phase detector compares this signal to the reference signal, which is derived by dividing the output from the VCTCXO.

The output of the phase detector is connected to the charge pump, which charges or discharges the integrator capacitor in the loop filter in accordance with the phase difference between the measured frequency and the reference frequency. The loop filter serves to filter the voltage across the integrator capacitor and generates a DC voltage that controls the frequency of UHF-VCO. The loop filter defines the step response of the PLL (settling time) and effects the stability of the loop. To preserve the stability of the loop a resistor is included for phase compensation. Other filter components are for sideband rejection.

The dividers are controlled via the serial bus. SDATA is for data, SCLK is the serial clock for the bus and SENA1 is a latch enable, which enables

diplexer that has one common antenna input/output is used. The selection between GSM900 and GSM1800 operation modes in the CRFU3 is done with the band selection signal (BAND_SEL) from the MAD in baseband.

GSM900 front-end

The GSM900 receiver is a dual conversion linear receiver. The front-end, which is located in the CRFU3 RF-, is activated with the band-selection signal (BAND_SEL) set to high-state. The received RF-signal from the antenna is fed via the diplex filter and the duplex filter to the LNA (Low Noise Amplifier) in the CRFU3. The active parts (RF-transistor and biasing and AGC-step circuitry) are integrated into this chip. Input and output matching networks are external. The Gain selection is done with the FRACTRL signal. The gain step in the LNA is activated when the RF-level at the antenna is about -47 dBm. After the LNA, the amplified signal (with low noise level) is fed to the bandpass filter, which is a SAW-filter (Surface Acoustic Wave). The duplex filter and the RX interstage bandpass filters together define how good the blocking characteristics are.

The bandpass filtered signal is then mixed down to 71 MHz, which is the first GSM900 intermediate frequency. The first mixer is located in the CRFU3 and upper side injection is used for the down mixing. The integrated mixer is a double balanced Gilbert cell. It is driven balanced. All active parts and biasing are integrated. Matching components are external. Because it is an active mixer it also amplifies the IF-signal. Buffering of the local signal is integrated too. The first local signal is generated by the UHF-synthesizer.

GSM1800 front-end

The GSM1800 receiver is a triple conversion linear receiver. The received RF-signal from the antenna is fed via the diplex filter, the RX-TX switch and the first RX SAW filter to the LNA in CRFU3. The RX-TX switch is controlled by the band selection signal (BAND_SEL = low) and the supply voltage for the transmitter part (VTX = low). VTX ensures that the switch can not turn to transmit position when the transceiver is in receive mode. The front-end in the CRFU3 is activated with band-selection signal (BAND_SEL) set to low-state. The active parts (RF-transistor and biasing and AGC-step circuitry) are integrated in this chip. The input and output matching networks are external. The gain selection is done with the FRACTRL signal. The gain step in the LNA is activated when the RF-level at the antenna is about -47 dBm. After the LNA, the amplified signal (with low noise level) is fed to the second RX-SAW bandpass filter. The two RX-SAW bandpass filters together define how good the blocking characteristics are.

The bandpass filtered signal is then mixed down to 187 MHz IF, which is the first GSM1800 intermediate frequency. The first mixer is located in the CRFU3 and upper side injection is used for the down mixing. The integrated mixer is a double balanced Gilbert cell. It is driven balanced. All active parts and biasing are integrated. Matching components are

external. Because it is an active mixer it also amplifies the IF-signal. Buffering of the local signal is integrated too. The first local signal is generated by the VHF-synthesizer.

There is a balanced discrete LC-bandpass filter in the output of the first mixer which e.g. attenuates the critical spurious frequencies 161 MHz and 277 MHz and also the 151,5 MHz half-IF. It also matches the impedance of 187MHz output to the input of the following stage. After this filter, the 187MHz IF-signal is mixed down to 71MHz IF, which is the second GSM1800 IF. The VHF-mixer is also a double balanced Gilbert cell and is located into the CRFU3. Lower side injection of the LO signal is used for this down conversion.

The 116MHz LO signal comes from the SUMMA-, where it is derived by dividing the 464MHz VHFLO signal by four. There is an external lowpass filter for the 116MHz LO signal that attenuates the harmonics (especially 232MHz) so that the critical mixing spurious will be attenuated.

Common Receiver parts for GSM900 and GSM1800

After the down conversions in the CRFU3– the RX-signal path is common for both systems. The 71MHz IF-signal is bandpass filtered with a selective SAW-filter. From the output of to IF-circuit input of the SUMMA, signal path is balanced. IF-filter provides selectivity for channels greater than +/-200 kHz. Also it attenuates image frequency of the following mixer and intermodulating signals. Selectivity is required in this place, because of needed linearity and without filtering adjacent channel interferes would be on too high signal level for the stages following.

Next stage in the receiver chain is an AGC-amplifier. It is integrated into the SUMMA. The AGC gain control is analog. The control voltage for the AGC is generated with a DA-converter in the COBBA in baseband. The AGC-stage provides an accurate gain control range (min. 57 dB) for the receiver. After the AGC-stage, the 71MHz IF-signal is mixed down to 13MHz. The needed 58MHz LO signal is generated in the SUMMA by dividing the VHF-synthesizer output (464 MHz) by eight.

The following IF-filter is a ceramic bandpass filter. It attenuates the signals in the adjacent channels, except for those separated +/- 200 kHz relative to the carrier. Very little attenuation is achieved for those signals in the filter, but they are filtered digitally by the baseband. Because of this the RX DACs has to be so good, that there is enough dynamic range for the faded 200 kHz interferers. The whole RX has to be able to handle signal levels in a linear way too. After the 13 MHz filter there is a buffer for the IF-signal, which also converts and amplifies the single-ended signal from filter to a balanced signal for the buffer and AD-converters in the COBBA. The Buffer in the SUMMA has a voltage gain of 36 dB and the buffer gain setting in the COBBA is 0 dB. It is possible to set the gainstep (95 dB) in the COBBA via the control bus, if needed.

The output of the upconverter is single-ended and requires an external matching.

The next stage is the TX interstage filter, which attenuates unwanted frequency components from the upconverter further. These unwanted component mainly originates from LO-leakage and insufficient suppression of the image frequency in the upconversion. The interstage filter attenuates wideband noise too. The filter is a bandpass SAW-filter.

Between the interstage filter and the GSM900 PA an attenuator is placed. The attenuator ensures both stability of the GSM900 PA because of constant 50 on the PA input and the right input level.

After the attenuator, the TX-signal is fed to the input of the GSM900 PA, which is a MMIC consisting of three amplifier stages and an interstage matching. It has a 50 input and output impedance. The gain control is integrated in the PA and is controlled with a power control loop circuit. The PA has more than 35 dB power gain and the maximum output power is approx. 35 dBm at an input level of 0 dBm. The gain control range is over 35 dB to ensure the desired power levels and power ramping up and down. The harmonics generated by the nonlinear PA (class AB) are filtered out with the duplexer.

After the duplexer the signal is fed to the diplexer. There is a directional coupler connected between the PA output and the duplex filter input to provide feedback for the power loop.

GSM1800 transmitter

The IQ-modulator generates a modulated TX IF-signal centered at 232 MHz, which is the VHF-synthesizer output divided by two. The TX-amplifier in the SUMMA has two selectable gain levels. The output (single-ended) is set to maximum via a control register in the SUMMA. After the SUMMA there is a SAW filter for reduction of noise and harmonics before the signal is fed for upconversion into the final TX-frequency in the CRFU3. The input of the SAW filter is single ended but the output is balanced. The upconversion mixer for GSM1800 is an image rejection mixer as well as the one for GSM900. The local oscillator signal needed in the upconversion is generated by the UHF-synthesizer. Buffers for the mixer are integrated into the CRFU3. The output of the upconverter is single ended and requires external matching to 50 impedance.

Then the GSM1800 TX signal passes through the first attenuator in the GSM1800 TX chain. This attenuator ensures the right input level to the buffer, also called pre-amplifier, which will be mentioned later.

The next stage is the first TX interstage filter, which attenuates unwanted frequency components from the upconverter. These unwanted component mainly originates from LO-leakage and insufficient suppression of the image frequency in the upconversion. The interstage filter attenuates wideband noise too. The filter is a bandpass SAW-filter.

To ensure enough power gain in the GSM1800 TX chain the TX signal then passes through the buffer (pre amplifier). The buffer is driven into saturation to compensate for variations in CRFU3 output level and ripple in the first TX interstage filter and to ensure constant input level at the GSM1800 PA.

The next stage is the second TX interstage filter, which attenuates unwanted frequency components from the buffer. The interstage filter also attenuates wideband noise. Both interstage filters is the same type of bandpass SAW-filter.

Between the second interstage filter and the GSM1800 PA the second attenuator is placed. The attenuator ensures both stability of the PA because of constant 50 on the PA input and the right input level.

After the second attenuator in the GSM1800 TX chain, the TX-signal is fed into the input of the GSM1800 PA. The GSM1800 PA contains three amplifier stages, interstage, input and output matchings. The PA has more than 33 dB power gain and the maximum output power is approx. 33 dBm at an input level of 0 dBm. The gain control range is over 35 dB to get the desired power levels and power ramping up and down.

The GSM1800 transmitter has no duplexer, but a TX/RX switch instead. This is due to space limitations. The TX/RX switch is set to transmit position with BAND_SEL = low and VTX = high.

After the TX/RX switch the signal is fed to the diplexer. There is a directional coupler connected between the PA output and the input of the TX/RX switch to provide feedback for the power loop.

Transmitter power control for GSM900 and GSM1800

The power control circuit consists of the gain control stage of the PA, a power detector at the PA output and an error amplifier in the SUMMA. There is a directional coupler connected after the PA output in both chains, but the power sensing line and detector are common for both bands. The GSM900 feedback signal is attenuated to the same level as the GSM1800 feedback signal. The combining of the two feedback signals is achieved with a diplexer. A sample is taken from the forward going power. This signal is rectified with a schottky-diode and after RC-filtering a DC-voltage is available. The DC-voltage reflects the output power. This power detector is linear on absolute scale, with the exception that it saturates on very low and high power levels, i.e. it forms an S-shaped curve.

The detected voltage is compared in the error-amplifier in the SUMMA to the TX power control voltage (TXC), which is generated by the DA-converter in the COBBA. The output of the error amplifier is fed to the gain control input of the PA. Because the gain control characteristics in the PA are linear in absolute scale, the control loop defines a voltage loop, when closed. The closed loop tracks the TXC-voltage. The shape of the

TXC-voltage as function of time has a raised cosine form (cos⁴ - function). This shape reduces the switching transients, when the power is pulsed up and down.

Because the dynamic range of the detector is not wide enough to control the power (actually RF output voltage) over the whole range, there is a control signal named TXP (TX power enable) to work under detected levels. The burst is enabled and set to rise with TXP until the output level is high enough for the feedback loop to work. The loop controls the output power via the control pin on the PA to the desired output level.

Because the feedback loop could be unstable, it is compensated with a dominating pole. This pole decreases the gain on higher frequencies to get the phase margins high enough.

AGC

The purpose of the AGC-amplifier is to maintain a constant output level from the receiver. To accomplish this, pre-monitoring is used. This pre-monitoring is done in three phases and determines the settling time for the RX AGC. The receiver is switched on approximately 150 s before the burst begins and DSP measures the received signal level. The DSP then adjusts the AGC-DAC in accordance with the measured signal level and/or switches on/off the LNA with the front-end amplifier control line (FRACTRL). The AGC amplifier has a 57 dB continuous controllable gain (-17 dB to 40 dB) while the gain control of the LNA has two steps. That is the gain in the LNA is either -16 dB or 15 dB.

The requirement for the received signal level under static conditions is that the MS shall measure and report to the BS over the range -110 dBm to -48 dBm. For RF levels above -48 dBm, the MS must report the same signal level to the BS. Because of those requirements, the LNA is turned "ON" (FRACTRL = "0") for received levels below -48 dBm. This leaves the AGC in the SUMMA to adjust the gain to desired output value (56mVpp). This is accomplished in DSP by measuring the received IQ level after the selectivity filtering (IF-filters, $\Sigma\Delta$ converter and FIR-filter in DSP). For RF levels below -94 dBm, the output level of the receiver drops dB by dB with a level of 9 mVp-p @ -110 dBm for GSM900 and 7.1 mVp-p @ -110 dBm for GSM1800.

This strategy is chosen as a compromise between avoiding saturation when strong interfering signals are present and not sacrificing the signal to noise ratio. The 56 mVpp target level is set, because the RX-DAC in the COBBA in baseband will saturate at 1.4 Vpp. This results in a headroom of 28 dB which is sufficient for the +/- 200 kHz faded adjacent channel (approximately 19 dB) and an extra 9 dB for pre-monitoring.

AFC function

In order to maintain the clock of the transceiver, i.e. the 13 MHz VCTCXO, locked to the frequency of the base station an AFC (Automatic Frequency Control) is used. The AFC reduces variations in the frequency of the VCTCXO due to temperature drift. The AFC voltage is generated by baseband with an 11 bit DAC in the COBBA. There is a RC-filter in the AFC control line to reduce the noise from the converter.

The AFC voltage is obtained by means of Pure Sine Wave (PSW) slots, which are a part of the signaling from the base station. The PSW slots are repeated every 10 frames, meaning that there is a slot in every 46 ms. Since changes in the VCTCXO -output frequency due to temperature variations are relatively slow compared to the 46 ms, the transceiver has a stable clock frequency.

When the transceiver is in sleep mode and "wakes" up to receive mode, there is only about 5 ms for the AFC-voltage to settle. When the first burst arrives the system clock has to be settled to +/- 0.1 ppm frequency accuracy. The VCTCXO-module requires about 4 ms to settle into the final frequency. The amplitude rises to maximum in about 3 ms, but because the frequency-settling time is higher, the oscillator must be powered up early enough to avoid frequency errors.

Interfacing

The interfacing between RF and BB is comprised of the signals stated below.

SCLK	Clock for the PLL Serial Programming (3.25 MHz)
SDATA	Data for the PLL Serial Programming
SENA1	Latch Enable for the PLL Serial Programming
FRACTRL	Front-end Amplifier Control - Turns the gain in the LNA on and off
BAND_SEL	Band Selection - Selects between GSM 900 and GSM 1800, i.e. it turns on the respective mixers and LNAs in the CRFU3.
RXC	Receiver Gain Control - The control voltage for the AGC amplifier.
AFC	Automatic Frequency Control Signal for the VCTCXO
RFC	A high stability clock signal for the logic circuits (13 MHz)
RXINN, RXINP	The differential RX signals to baseband
TXC	Transmitter power Control signal, that controls the shape of the burst.
TXP	Transmitter Power enable ??
TXIN, TXIP	Differential In-phase TX baseband signals for the RF modulator
TXQN, TXQP	Differential Quadrature-phase TX baseband signals for the RF modulator
VTX	Supply voltage for the TX chain, which is also used for control of the GSM 1800 TX/RX switch together with BAND_SEL and VRX_1
VRX_1	Supply voltage for a part of the RX chain, which is also used for control of the GSM 1800 TX/RX switch

User Interface

The UI module includes the following:–

- LEDs for backlight
- Plastic Window
- Dust Seal,
- LCD adhesive,
- Light Guide
- Reflector,
- Connector
- LCD cell (GD50) with display driver
- ON/OFF key
- Speaker Connections

The module is delivered as a single assembly, (refer to *disassembly* section).

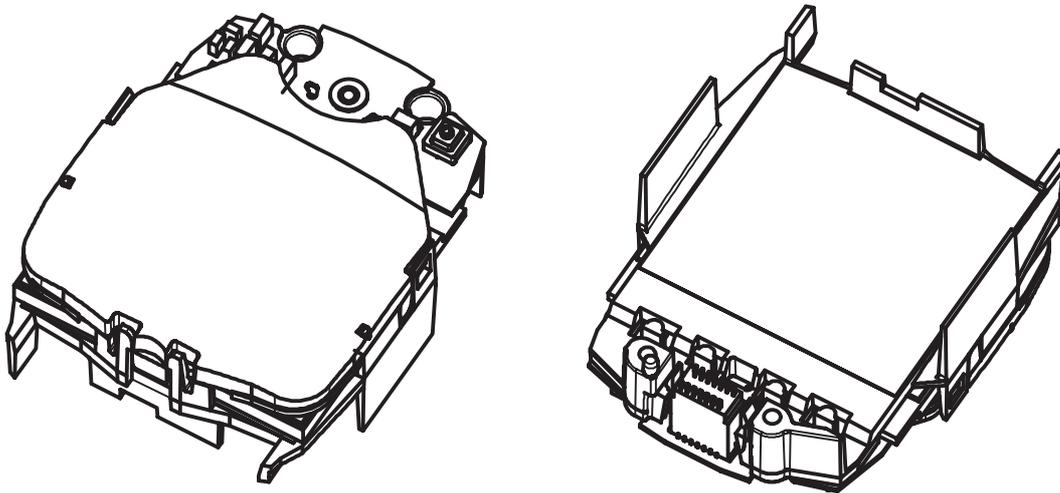


Figure 19. UI module assembled

LEDs

LEDs for the backlight of the LCD via the lightguide are mounted on the back side of the module's FPC. There are 4 specially designed LEDs placed with a chip in the upper part of the LED.

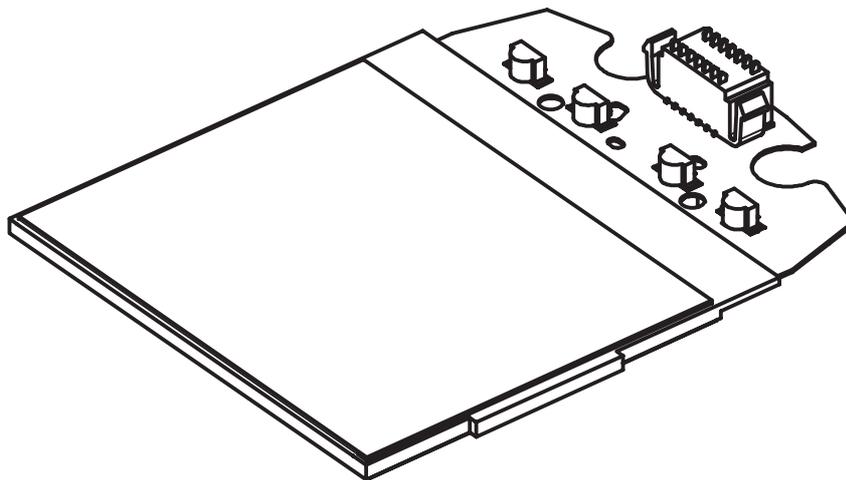


Figure 20. Mounting of LEDs for backlight. Seen from underside.

Plastic Window

The window is mounted on top of the LCD module. It snaps into the lightguide in three places. If a broken window needs replacing, it is replaced together with the dust seal.

Dust Seal

The dust seal is made of foam with adhesive backing on both sides. It keeps dust out of the LCD module and protects it from excessive pressure on the window, if pressed too hard. The dust seal is mounted inside the window and placed onto the LCD module. The window adhesive is high tack. The LCD adhesive is low tack to ease replacement of the window.

LCD Adhesive

This is a thin strip of foil with adhesive on both sides, it keeps the LCD module in place and protects it if the phone is dropped.

Reflector

The reflector is adhered to the underside of the lightguide to reflect the backlight up to the viewing area. A thin adhesive border holds it in place and also keeps out dust.

Connector

The connector makes a mechanical connection between light guide and LCD, so the LCD can be clicked onto the light guide. Also it makes electrical connection between LCD cell and PCB. The connector is not attached to the PCB, but the 14 pin connector contains springs and makes the contact.

Light Guide

The Lightguide houses and connects the LCD module to the PCB and backlights the display. Several snap fits locate the Window and a Board to Board Connector.

Evenly distributed backlighting is controlled by a graduated etched pattern. The pattern becomes rougher the further it gets from the LEDs. This is on the underside, in the visual area. The rest of the Lightguide is polished to minimise light losses in the system.

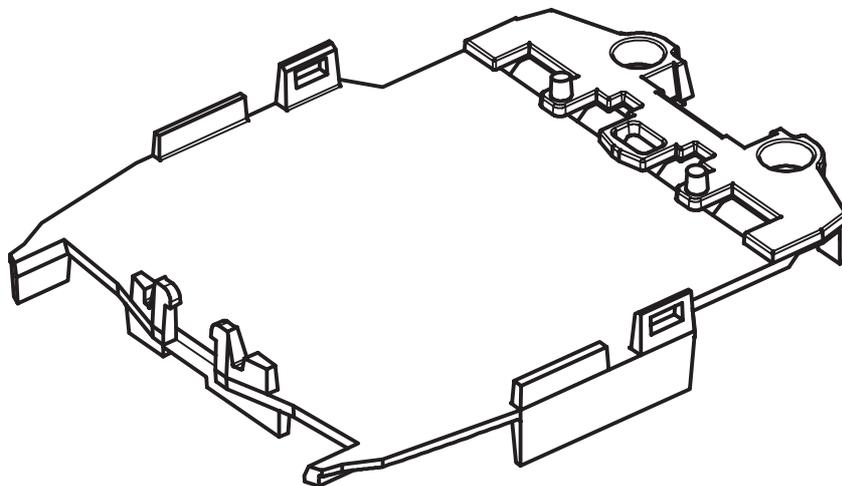


Figure 21. Light guide.

The figure below, shows the code marking for the light guide.

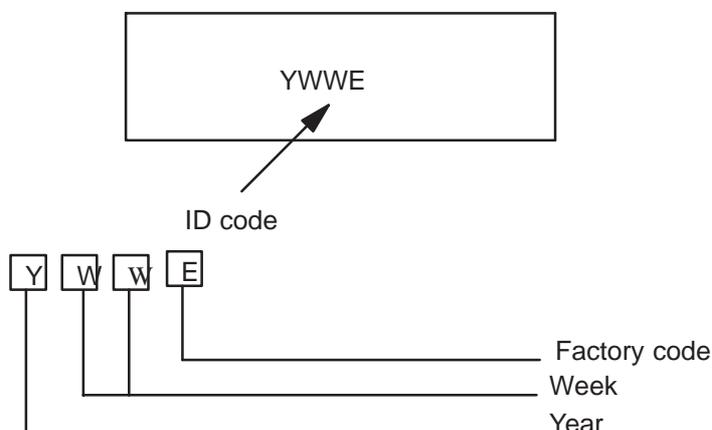


Figure 22. Marking specification for the light guide

UI Module Connection to main PCB

Table 17. Module interface

Pin	Signal	Symbol	Parameter	Minimum	Typical / Nominal	Maximum	Unit / Notes
1	Temp Sensor		Temperature at LCD for compensation of contrast and brightness. Reference to GND		47		kΩ NTC resistor (@ 25°C).
2	LDCDCX	tsas	Control/display data flag input.	150			ns/Setup time
		tsah		150			ns/Hold time
				low			Control data
						HIGH	Display data
3	SPKR_p		Speaker connection	150			
4	LCDCSX	tcss	Chip select input, active low.				ns
		tcsh		150			ns
				0.7xVDD			V/HIGH
						0.2xVDD	V/LOW
	SCL		Serial clock input.	0		3.250	MHz/ VDD=2.7V

Table 17. Module interface (continued)

Pin	Signal	Symbol	Parameter	Minimum	Typical / Nominal	Maximum	Unit / Notes
5		tscyc		250			ns
		tshw		100			ns
		tslw		100			ns
6	SPKR_n		Speaker connection				
7	ON/OFF_key		ON/OFF key connection. Referenced to GND	0		VDD	V
8	LED-		LED negative connection.		60		mA
9	LED+		LED positive connection.		60		mA
10	ESD-GND	GND	GND		0		V
11	GND	GND	GND		0		V
12	VDD		Supply voltage.	2.7	2.8	3.3	V
				100		200	uA/nominal supply volt., text on display @ 25°C
13	SDA	tsds	Serial data input.				
		tsdh		100			ns
14	RES		Reset.			0.2xVDD	V/LOW
				1.0			us/Reset

Table 18. Input signals change time

Signal	Symbol	Parameter	Minimum	Typical / Nominal	Maximum	Unit / Notes
data signals	tr,tf				50	ns

Parts Lists

System Module (O201180)

(EDMS V2.13)

R100	1430788	Chip resistor	22 k	5 % 0.063 W 0402
R101	1825005	Chip varistor	vwm14v vc30v	0805
R102	1419003	Chip resistor	22	5 % 0.063 W 0402
R103	1430796	Chip resistor	47 k	5 % 0.063 W 0402
R104	1430770	Chip resistor	4.7 k	5 % 0.063 W 0402
R105	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R106	1430770	Chip resistor	4.7 k	5 % 0.063 W 0402
R107	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R108	1430796	Chip resistor	47 k	5 % 0.063 W 0402
R110	1430812	Chip resistor	220 k	5 % 0.063 W 0402
R111	1430778	Chip resistor	10 k	5 % 0.063 W 0402
R112	1430796	Chip resistor	47 k	5 % 0.063 W 0402
R113	1430788	Chip resistor	22 k	5 % 0.063 W 0402
R114	1430718	Chip resistor	47	5 % 0.063 W 0402
R115	1620025	Res network	0w06 2x100k j	0404
R116	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R117	1430826	Chip resistor	680 k	5 % 0.063 W 0402
R118	1430830	Chip resistor	1.0 M	5 % 0.063 W 0402
R119	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R120	1620017	Res network	0w06 2x100r j	0404
R121	1430796	Chip resistor	47 k	5 % 0.063 W 0402
R122	1430830	Chip resistor	1.0 M	5 % 0.063 W 0402
R123	1620019	Res network	0w06 2x10k j	0404
R124	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R125	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R126	1430826	Chip resistor	680 k	5 % 0.063 W 0402
R129	1430810	Chip resistor	180 k	5 % 0.063 W 0402
R130	1430778	Chip resistor	10 k	5 % 0.063 W 0402
R131	1430812	Chip resistor	220 k	5 % 0.063 W 0402
R132	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R134	1430740	Chip resistor	330	5 % 0.063 W 0402
R135	1430830	Chip resistor	1.0 M	5 % 0.063 W 0402
R136	1430690	Chip jumper		0402
R137	1430690	Chip jumper		0402
R139	1430778	Chip resistor	10 k	5 % 0.063 W 0402
R140	1430770	Chip resistor	4.7 k	5 % 0.063 W 0402
R141	1430812	Chip resistor	220 k	5 % 0.063 W 0402

R145	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R146	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R147	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R148	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R149	1430778	Chip resistor	10 k	5 % 0.063 W 0402
R150	1430726	Chip resistor	100	5 % 0.063 W 0402
R200	1430804	Chip resistor	100 k	5 % 0.063 W 0402
R201	1430804	Chip resistor	100 k	5 % 0.063 W 0402
R300	1430804	Chip resistor	100 k	5 % 0.063 W 0402
R301	1430700	Chip resistor	10	5 % 0.063 W 0402
R304	1430796	Chip resistor	47 k	5 % 0.063 W 0402
R306	1430812	Chip resistor	220 k	5 % 0.063 W 0402
R350	1430693	Chip resistor	5.6	5 % 0.063 W 0402
R351	1430693	Chip resistor	5.6	5 % 0.063 W 0402
R352	1430778	Chip resistor	10 k	5 % 0.063 W 0402
R353	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R354	1430693	Chip resistor	5.6	5 % 0.063 W 0402
R355	1430693	Chip resistor	5.6	5 % 0.063 W 0402
R357	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402
R358	1430804	Chip resistor	100 k	5 % 0.063 W 0402
R400	1430748	Chip resistor	680	5 % 0.063 W 0402
R401	1430748	Chip resistor	680	5 % 0.063 W 0402
R402	1430714	Chip resistor	33	5 % 0.063 W 0402
R403	1430748	Chip resistor	680	5 % 0.063 W 0402
R404	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R405	1430714	Chip resistor	33	5 % 0.063 W 0402
R406	1430714	Chip resistor	33	5 % 0.063 W 0402
R407	1430730	Chip resistor	150	5 % 0.063 W 0402
R408	1430730	Chip resistor	150	5 % 0.063 W 0402
R409	1430744	Chip resistor	470	5 % 0.063 W 0402
R410	1430744	Chip resistor	470	5 % 0.063 W 0402
R411	1430730	Chip resistor	150	5 % 0.063 W 0402
R412	1430744	Chip resistor	470	5 % 0.063 W 0402
R413	1430778	Chip resistor	10 k	5 % 0.063 W 0402
R414	1430714	Chip resistor	33	5 % 0.063 W 0402
R500	1430772	Chip resistor	5.6 k	5 % 0.063 W 0402
R501	1430772	Chip resistor	5.6 k	5 % 0.063 W 0402
R502	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402
R503	1430734	Chip resistor	220	5 % 0.063 W 0402
R504	1430710	Chip resistor	22	5 % 0.063 W 0402
R505	1430734	Chip resistor	220	5 % 0.063 W 0402
R506	1430726	Chip resistor	100	5 % 0.063 W 0402

R507	1430718	Chip resistor	47	5 % 0.063 W 0402	
R508	1430718	Chip resistor	47	5 % 0.063 W 0402	
R509	1430726	Chip resistor	100	5 % 0.063 W 0402	
R510	1430700	Chip resistor	10	5 % 0.063 W 0402	
R511	1430744	Chip resistor	470	5 % 0.063 W 0402	
R512	1430744	Chip resistor	470	5 % 0.063 W 0402	
R513	1430744	Chip resistor	470	5 % 0.063 W 0402	
R514	1430700	Chip resistor	10	5 % 0.063 W 0402	
R515	1430744	Chip resistor	470	5 % 0.063 W 0402	
R516	1430726	Chip resistor	100	5 % 0.063 W 0402	
R601	1430700	Chip resistor	10	5 % 0.063 W 0402	
R602	1430728	Chip resistor	120	5 % 0.063 W 0402	
R603	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R604	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R605	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R606	1430832	Chip resistor	2.7 k	5 % 0.063 W 0402	
R607	1430738	Chip resistor	270	5 % 0.063 W 0402	
R608	1430722	Chip resistor	68	5 % 0.063 W 0402	
R609	1430700	Chip resistor	10	5 % 0.063 W 0402	
R610	1430700	Chip resistor	10	5 % 0.063 W 0402	
R611	1430746	Chip resistor	560	5 % 0.063 W 0402	
R612	1430746	Chip resistor	560	5 % 0.063 W 0402	
R614	1430690	Chip jumper		0402	
R615	1430832	Chip resistor	2.7 k	5 % 0.063 W 0402	
R616	1430832	Chip resistor	2.7 k	5 % 0.063 W 0402	
R618	1430772	Chip resistor	5.6 k	5 % 0.063 W 0402	
R619	1430710	Chip resistor	22	5 % 0.063 W 0402	
R700	1430764	Chip resistor	3.3 k	5 % 0.063 W 0402	
R701	1430744	Chip resistor	470	5 % 0.063 W 0402	
R702	1430778	Chip resistor	10 k	5 % 0.063 W 0402	
R703	1430734	Chip resistor	220	5 % 0.063 W 0402	
R704	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R705	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402	
R706	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R707	1430784	Chip resistor	15 k	5 % 0.063 W 0402	
R708	1620019	Res network 0w06 2x10k j		0404	0404
R709	1430710	Chip resistor	22	5 % 0.063 W 0402	
R710	1620019	Res network 0w06 2x10k j		0404	0404
R711	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402	
R712	1430726	Chip resistor	100	5 % 0.063 W 0402	
R713	1430710	Chip resistor	22	5 % 0.063 W 0402	
R714	1620019	Res network 0w06 2x10k j		0404	0404

R715	1430788	Chip resistor	22 k	5 % 0.063 W 0402	
R716	1430740	Chip resistor	330	5 % 0.063 W 0402	
R717	1430734	Chip resistor	220	5 % 0.063 W 0402	
R718	1430734	Chip resistor	220	5 % 0.063 W 0402	
R719	1430724	Chip resistor	82	5 % 0.063 W 0402	
R720	1430718	Chip resistor	47	5 % 0.063 W 0402	
R721	1430734	Chip resistor	220	5 % 0.063 W 0402	
R722	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R723	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R724	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R725	1430770	Chip resistor	4.7 k	5 % 0.063 W 0402	
R726	1430778	Chip resistor	10 k	5 % 0.063 W 0402	
R727	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R728	1430754	Chip resistor	1.0 k	5 % 0.063 W 0402	
R729	1430790	Chip resistor	27 k	5 % 0.063 W 0402	
R730	1430772	Chip resistor	5.6 k	5 % 0.063 W 0402	
R731	1430762	Chip resistor	2.2 k	5 % 0.063 W 0402	
R732	1620103	Res network 0w06 2x22r j	0404		0404
R733	1430792	Chip resistor	33 k	5 % 0.063 W 0402	
R734	1430830	Chip resistor	1.0 M	5 % 0.063 W 0402	
R735	1430772	Chip resistor	5.6 k	5 % 0.063 W 0402	
R736	1430804	Chip resistor	100 k	5 % 0.063 W 0402	
R737	1430742	Chip resistor	390	5 % 0.063 W 0402	
R739	1430772	Chip resistor	5.6 k	5 % 0.063 W 0402	
R740	1430792	Chip resistor	33 k	5 % 0.063 W 0402	
C100	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402	
C101	2320546	Ceramic cap.	27 p	5 % 50 V 0402	
C102	2320481	Ceramic cap.	5R 1 u	10 % 0603	
C103	2320546	Ceramic cap.	27 p	5 % 50 V 0402	
C104	2320544	Ceramic cap.	22 p	5 % 50 V 0402	
C105	2320620	Ceramic cap.	10 n	5 % 16 V 0402	
C106	2320546	Ceramic cap.	27 p	5 % 50 V 0402	
C107	2320546	Ceramic cap.	27 p	5 % 50 V 0402	
C108	2320805	Ceramic cap.	100 n	10 % 10 V 0402	
C109	2320481	Ceramic cap.	5R 1 u	10 % 0603	
C110	2320805	Ceramic cap.	100 n	10 % 10 V 0402	
C112	2320805	Ceramic cap.	100 n	10 % 10 V 0402	
C113	2320805	Ceramic cap.	100 n	10 % 10 V 0402	
C114	2320546	Ceramic cap.	27 p	5 % 50 V 0402	
C115	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6	
C116	2320805	Ceramic cap.	100 n	10 % 10 V 0402	
C117	2320805	Ceramic cap.	100 n	10 % 10 V 0402	

C118	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C119	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C120	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C121	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C122	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C123	2320783	Ceramic cap.	33 n	10 % 10 V 0402
C124	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C125	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C126	2320779	Ceramic cap.	100 n	10 % 16 V 0603
C127	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C128	2310793	Ceramic cap.	2.2 u	10 % 10 V 0805
C129	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C130	2320560	Ceramic cap.	100 p	5 % 50 V 0402
C131	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C132	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C133	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C134	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C135	2320481	Ceramic cap.	5R 1 u	10 % 0603
C136	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C137	2320481	Ceramic cap.	5R 1 u	10 % 0603
C138	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C139	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C140	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C141	2320481	Ceramic cap.	5R 1 u	10 % 0603
C142	2320481	Ceramic cap.	5R 1 u	10 % 0603
C143	2312401	Ceramic cap.	1.0 u	10 % 10 V 0805
C144	2611715	Tantalum cap.	1.0 u	20 % 35 V 3.2x1.6x1.6
C145	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C146	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C147	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C148	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C149	2320560	Ceramic cap.	100 p	5 % 50 V 0402
C150	2320508	Ceramic cap.	1.0 p	0.25 % 50 V 0402
C151	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C152	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C153	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C154	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C155	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C156	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C157	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C158	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C159	2320805	Ceramic cap.	100 n	10 % 10 V 0402

C160	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C161	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C162	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C163	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C164	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C165	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C166	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C167	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C168	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C169	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C170	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C171	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C172	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C173	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C174	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C175	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C176	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C200	2320783	Ceramic cap.	33 n	10 % 10 V 0402
C201	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C202	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C203	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C204	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C300	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C301	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C302	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C303	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C304	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C305	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C306	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C307	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C308	2320481	Ceramic cap.	5R 1 u	10 % 0603
C309	2320481	Ceramic cap.	5R 1 u	10 % 0603
C310	2320481	Ceramic cap.	5R 1 u	10 % 0603
C311	2320481	Ceramic cap.	5R 1 u	10 % 0603
C312	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C350	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C351	2320481	Ceramic cap.	5R 1 u	10 % 0603
C352	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C353	2320481	Ceramic cap.	5R 1 u	10 % 0603
C354	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C355	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C356	2320546	Ceramic cap.	27 p	5 % 50 V 0402

C400	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C401	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C402	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C403	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C404	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C405	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C500	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C501	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C502	2320520	Ceramic cap.	2.2 p	0.25 % 50 V 0402
C503	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C504	2320536	Ceramic cap.	10 p	5 % 50 V 0402
C506	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C507	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C508	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C509	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C510	2320560	Ceramic cap.	100 p	5 % 50 V 0402
C511	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C512	2312401	Ceramic cap.	1.0 u	10 % 10 V 0805
C513	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C514	2320536	Ceramic cap.	10 p	5 % 50 V 0402
C515	2320536	Ceramic cap.	10 p	5 % 50 V 0402
C516	2320091	Ceramic cap.	2.2 n	5 % 50 V 0603
C518	2611691	Tantalum cap.	470 u	20 % 10 V 7.3x4.3x4.1
C519	2312401	Ceramic cap.	1.0 u	10 % 10 V 0805
C520	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C521	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C522	2320560	Ceramic cap.	100 p	5 % 50 V 0402
C523	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C524	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C525	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C526	2320091	Ceramic cap.	2.2 n	5 % 50 V 0603
C527	2320530	Ceramic cap.	5.6 p	0.25 % 50 V 0402
C528	2310781	Ceramic cap.	220 n	10 % 16 V 0805
C529	2310781	Ceramic cap.	220 n	10 % 16 V 0805
C530	2310781	Ceramic cap.	220 n	10 % 16 V 0805
C600	2320518	Ceramic cap.	1.8 p	0.25 % 50 V 0402
C601	2320540	Ceramic cap.	15 p	5 % 50 V 0402
C602	2320530	Ceramic cap.	5.6 p	0.25 % 50 V 0402
C603	2320540	Ceramic cap.	15 p	5 % 50 V 0402
C604	2320532	Ceramic cap.	6.8 p	0.25 % 50 V 0402
C605	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C606	2320546	Ceramic cap.	27 p	5 % 50 V 0402

C607	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C608	2320520	Ceramic cap.	2.2 p	0.25 % 50 V 0402
C609	2320522	Ceramic cap.	2.7 p	0.25 % 50 V 0402
C610	2320530	Ceramic cap.	5.6 p	0.25 % 50 V 0402
C611	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C612	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C613	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C614	2320532	Ceramic cap.	6.8 p	0.25 % 50 V 0402
C615	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C616	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C617	2320556	Ceramic cap.	68 p	5 % 50 V 0402
C618	2320556	Ceramic cap.	68 p	5 % 50 V 0402
C619	2320524	Ceramic cap.	3.3 p	0.25 % 50 V 0402
C621	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C622	2320564	Ceramic cap.	150 p	5 % 50 V 0402
C623	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C624	2320805	Ceramic cap.	100 n	10 % 10 V 0402
C625	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C626	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C627	2320526	Ceramic cap.	3.9 p	0.25 % 50 V 0402
C628	2320526	Ceramic cap.	3.9 p	0.25 % 50 V 0402
C629	2320526	Ceramic cap.	3.9 p	0.25 % 50 V 0402
C630	2320526	Ceramic cap.	3.9 p	0.25 % 50 V 0402
C631	2320536	Ceramic cap.	10 p	5 % 50 V 0402
C632	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C633	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C634	2320526	Ceramic cap.	3.9 p	0.25 % 50 V 0402
C635	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C636	2320534	Ceramic cap.	8.2 p	0.25 % 50 V 0402
C637	2320532	Ceramic cap.	6.8 p	0.25 % 50 V 0402
C638	2320518	Ceramic cap.	1.8 p	0.25 % 50 V 0402
C639	2320534	Ceramic cap.	8.2 p	0.25 % 50 V 0402
C640	2320536	Ceramic cap.	10 p	5 % 50 V 0402
C641	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C642	2320532	Ceramic cap.	6.8 p	0.25 % 50 V 0402
C643	2320530	Ceramic cap.	5.6 p	0.25 % 50 V 0402
C645	2320564	Ceramic cap.	150 p	5 % 50 V 0402
C646	2320580	Ceramic cap.	680 p	5 % 50 V 0402
C647	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C700	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C701	2320534	Ceramic cap.	8.2 p	0.25 % 50 V 0402
C702	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402

C703	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C704	2320534	Ceramic cap.	8.2 p	0.25 % 50 V 0402
C705	2320572	Ceramic cap.	330 p	5 % 50 V 0402
C706	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C707	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C708	2320556	Ceramic cap.	68 p	5 % 50 V 0402
C709	2320556	Ceramic cap.	68 p	5 % 50 V 0402
C710	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C711	2320602	Ceramic cap.	4.7 p	0.25 % 50 V 0402
C712	2320530	Ceramic cap.	5.6 p	0.25 % 50 V 0402
C713	2320568	Ceramic cap.	220 p	5 % 50 V 0402
C714	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C715	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C716	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C717	2320526	Ceramic cap.	3.9 p	0.25 % 50 V 0402
C718	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C719	2320568	Ceramic cap.	220 p	5 % 50 V 0402
C720	2320562	Ceramic cap.	120 p	5 % 50 V 0402
C721	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C722	2312401	Ceramic cap.	1.0 u	10 % 10 V 0805
C723	2320550	Ceramic cap.	39 p	5 % 50 V 0402
C724	2320536	Ceramic cap.	10 p	5 % 50 V 0402
C725	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C726	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C727	2320538	Ceramic cap.	12 p	5 % 50 V 0402
C728	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C729	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C730	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C731	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C732	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C733	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C734	2320560	Ceramic cap.	100 p	5 % 50 V 0402
C735	2320560	Ceramic cap.	100 p	5 % 50 V 0402
C736	2320546	Ceramic cap.	27 p	5 % 50 V 0402
C737	2312401	Ceramic cap.	1.0 u	10 % 10 V 0805
C738	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C739	2320620	Ceramic cap.	10 n	5 % 16 V 0402
C740	2310209	Ceramic cap.	2.2 n	5 % 50 V 1206
C741	2320584	Ceramic cap.	1.0 n	5 % 50 V 0402
C742	2610003	Tantalum cap.	10 u	20 % 10 V 3.2x1.6x1.6
C743	2320524	Ceramic cap.	3.3 p	0.25 % 50 V 0402
C744	2320560	Ceramic cap.	100 p	5 % 50 V 0402

C745	2320524	Ceramic cap.	3.3 p	0.25 % 50 V	0402
C746	2320570	Ceramic cap.	270 p	5 % 50 V	0402
C747	2320546	Ceramic cap.	27 p	5 % 50 V	0402
C748	2320091	Ceramic cap.	2.2 n	5 % 50 V	0603
C749	2320516	Ceramic cap.	1.5 p	0.25 % 50 V	0402
C750	2312401	Ceramic cap.	1.0 u	10 % 10 V	0805
C751	2320546	Ceramic cap.	27 p	5 % 50 V	0402
C752	2320564	Ceramic cap.	150 p	5 % 50 V	0402
C753	2320564	Ceramic cap.	150 p	5 % 50 V	0402
C754	2320620	Ceramic cap.	10 n	5 % 16 V	0402
C755	2320564	Ceramic cap.	150 p	5 % 50 V	0402
C756	2320620	Ceramic cap.	10 n	5 % 16 V	0402
L100	3203701	Ferrite bead	33r/100mhz		0805
L102	3203701	Ferrite bead	33r/100mhz		0805
L103	3203701	Ferrite bead	33r/100mhz		0805
L400	3203701	Ferrite bead	33r/100mhz		0805
L500	4551005	Dir.coupler	897.5+/-17.5mhz	2x1.4	
L501	3641521	Chip coil	6. Q n	5 % Q=50/250 MHz	0805
L502	3645185	Chip coil	10.Q n	5 % Q=12/100 MHz	0603
L503	4551007	Dir.coupler	1747.5+/-37.5mhz	2x1.4	
L504	3645167	Chip coil	2.-0 n	Q=10/100M	0603
L505	3645121	Chip coil	6. Q n	5 % Q=32/800M	0603
L600	3643037	Chip coil	180 n	5 % Q=35/100 MHz	0805
L601	3643037	Chip coil	180 n	5 % Q=35/100 MHz	0805
L602	3645009	Chip coil	33 n	5 % Q=12/100 MHz	0603
L603	3645009	Chip coil	33 n	5 % Q=12/100 MHz	0603
L604	3645057	Chip coil	82 n	2 % Q=65/500 MHz	0805
L605	3645017	Chip coil	5. Q n	10 % Q=10/100 MHz	0603
L606	3645193	Chip coil	18.Q n	5 % Q=12/100 MHz	0603
L607	3645181	Chip coil	3. Q n	10 % Q=10/100 MHz	0603
L608	3645121	Chip coil	6. Q n	5 % Q=32/800M	0603
L609	3645229	Chip coil	120 n	5 % Q=32/150 MHz	0603
L610	3645229	Chip coil	120 n	5 % Q=32/150 MHz	0603
L611	3645001	Chip coil	4. Q n	10 % Q=10/100 MHz	0603
L612	3645179	Chip coil	2.-0 n	Q=8/100M	0603
L613	3645181	Chip coil	3. Q n	10 % Q=10/100 MHz	0603
L614	3645229	Chip coil	120 n	5 % Q=32/150 MHz	0603
L615	3645029	Chip coil	1. Q u	10 % Q=45/10 MHz	0805
L616	364M219	Chip coil	15.Q n	10 % Q=30/800 MHz	0402
L617	3645179	Chip coil	2.-0 n	Q=8/100M	0603
L700	3645163	Chip coil	22.Q n	10 % Q=12/100 MHz	0603
L701	3645031	Chip coil	330 n	10 % Q=20/25 MHz	0805

L702	3641601	Chip coil	150 n	2 % Q=35/100 MHz	0805	
L703	3641622	Chip coil	220 n	5 % Q=30/100 MHz	0805	
L704	3641622	Chip coil	220 n	5 % Q=30/100 MHz	0805	
L705	3645161	Chip coil	150 n	5 % Q=14/100 MHz	0603	
L706	3641324	Chip coil	10 u	10 % Q=25/2.52 MHz	1008	
L707	3645029	Chip coil	1. Q u	10 % Q=45/10 MHz	0805	
L708	3641541	Chip coil	47.Q n	2 % Q=40/200 MHz	0805	
L709	3645195	Chip coil	82.Q n	5 % Q=12/100 MHz	0603	
B100	451X083	Crystal	32.768 k			
G700	4350149	Vco	1942–2067mhz	2.8v 10ma		
G701	4510229	VCTCXO	13 M	+–3PPM 2.8V		
G702	4350155	Vco	464mhz	2.8v 7ma		
F100	5119019	SM, fuse	f 1.5a	32v	0603	
Z100	3640035	Filt	z>450r/100m	0r7max 0.2a	0603	0603
Z101	3640035	Filt	z>450r/100m	0r7max 0.2a	0603	0603
Z102	3640035	Filt	z>450r/100m	0r7max 0.2a	0603	0603
Z103	3640035	Filt	z>450r/100m	0r7max 0.2a	0603	0603
Z104	3640035	Filt	z>450r/100m	0r7max 0.2a	0603	0603
Z500	451P047	Dupl	890–915/935–960mhz	15.0x8.2		15.0x8.2
Z501	455P003	Use code	4550073			
Z502	4511087	Saw filter	1747.5+–37.5			
Z503	4550071	Dipl	890–960/1710–1880mhz			
Z504	4512097	Ant.sw+filt	1747.5/1842.5			
Z505	4550071	Dipl	890–960/1710–1880mhz			
Z600	4511049	Saw filter	947.5+–12.5			
Z601	4511015	Saw filter	902.5+–12.5			
Z602	451H129	Use code	4511103			
Z603	4511087	Saw filter	1747.5+–37.5			
Z700	451H138	Saw filter	71+–0.09			
Z701	4510009	Cer.filt	13+–0.09mhz			
Z702	4511085	Saw filter	232+–0.5			
T600	3640413	Transf balun	1.8ghz+–100mhz			
V100	4113601	Emi filter	emif01–5250sc5			
V101	4113601	Emi filter	emif01–5250sc5			
V102	4113601	Emi filter	emif01–5250sc5			
V103	4210215	Transistor	MMBT589 pnp	30 V 1 A		
V104	4110067	Schottky diode	MBR0520L	20 V 0.5 A		
V105	4110601	Diode	FAST	SOD323		
V106	4113601	Emi filter	emif01–5250sc5	sot23–5		
V107	4113651	Trans. supr.	QUAD	6 V		
V108	4108639	Diode x 2	BAS28	75 V 250 mA		
V109	4200226	Darl. transistor	BCV27 npn	30 V 300 mA		

V110	4210100	TransistorBC848W npn 30 V	
V111	4210100	TransistorBC848W npn 30 V SOT323	
V112	4110601	Diode FAST	
V113	421J133	MosFet	
V350	4210052	TransistorDTC114EE npn RB V EM3	
V351	4210102	TransistorBC858W pnp 30 V 100 mA 200MW	
V400	4864389	Led	0603
V401	4864389	Led	0603
V402	4864389	Led	0603
V403	4864389	Led	0603
V404	4864389	Led	0603
V405	4864389	Led	0603
V406	4200836	TransistorBCX19 npn 50 V 0.5 A	
V407	4100278	Diode x 2 BAV70	70 V 200 mA COMCAT.
V408	4200836	TransistorBCX19 npn 50 V 0.5 A	
V409	4200836	TransistorBCX19 npn 50 V 0.5 A	
V410	4110601	Diode FAST	
V500	4110079	Sch. diode x 2HSMS282C	15 V
V701	4219908	Transistor x 2	
V702	4210100	TransistorBC848W npn 30 V	
D100	434X061	IC, MCU MC33464N	
D300	4370489	Mad2pr1 v5 f721558 3 UBGA144	
D301	4340585	IC, flash mem.UBGA48	
D302	434L153	IC, SRAM	
D303	4340585	IC, flash mem.UBGA48	
D304	4340187	IC, 1xor 2input 1v sot3	TC7SL32FU
D305	4340187	IC, 1xor 2input 1v sot3	TC7SL32FU
D306	4340451	IC, 1xinv 1input 1v sot3	TC7SL04FU
D350	4340369	IC, dual bus buffer sso	TC7W126FU
D700	4340451	IC, 1xinv 1input 1v sot3	TC7SL04FU
N100	4370467	Ccont2i wfd163kg64t/8 lfbga8x8	
N101	4370165	Chaps charger control	so16
N200	437L228	Cobba_gjp asic v3.1	bga64
N350	4860031	Tfdu4100 irda tx/rx>2.7v 115kbits	
N500	4350173	IC, pow.amp. 3.5 V	
N501	4350175	IC, pow.amp. 3.5 V	
N502	4340263	IC, RF amp.21DB/900MHZ	
N503	4219941	Transistor x 2	
N600	437L176	Crfu3 rf asic gsm/pcn bf tqfp-48	
N700	4370351	Summa v2 rx,tx,pll,pcontr. tqfp48	
S416	520Y004	Use code 5409077	
X100	5409065	SM, sim card conn 2x3pol p2.54	

X101	5469069	SM, batt conn 2pol spr p3.5 100V2A
X102	5469069	SM, batt conn 2pol spr p3.5 100V2A
X200	5469061	SM, system conn 6af+3dc+mic+jack
X501	5429007	SM, coax conn m sw 50r 0.4-2ghz
A600	9517025	Rx-tx shield assy dmc01305
A601	9517024	Pa shield assy dmc01304 pica
A602	9510420	Filter shield dmd03521 pica
	854270	PC board UG8

[This page intentionally left blank]